



Test Report: HRP-600N-24

600W Single Output with PFC Function

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

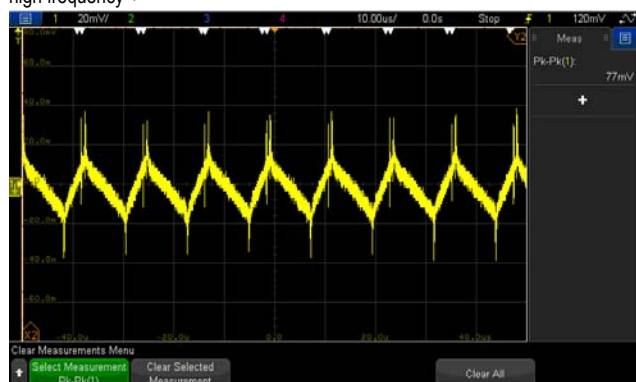
ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 21.6 V~ 28.8 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	18.97V~29.67V/230VAC 18.97V~29.67V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1.0 %~ +1.0 %	I/P: 85VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.03 %~0.03 %
3	LINE REGULATION (Max)	V1: -0.2%~ +0.2%	I/P: 85VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.02%~ 0.02%
4	LOAD REGULATION(Max)	V1: -0.5 %~ +0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.03 %~0.03 %
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	2.1%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 82mVp-p

high frequency :



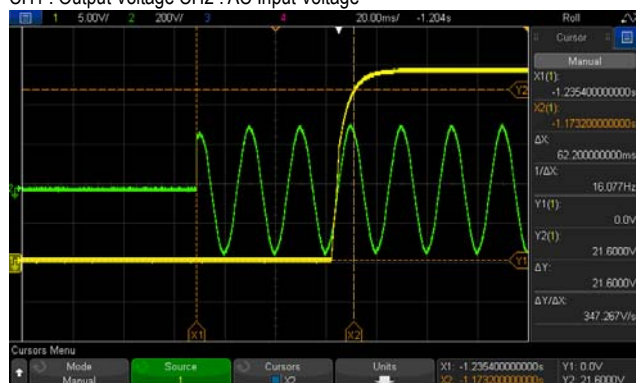
low frequency :



7	SET UP TIME(Max)	230VAC/ 1800ms 115VAC/ 3600ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 62.2 ms 115VAC/ 160.2ms
---	------------------	----------------------------------	--	------------------------------------

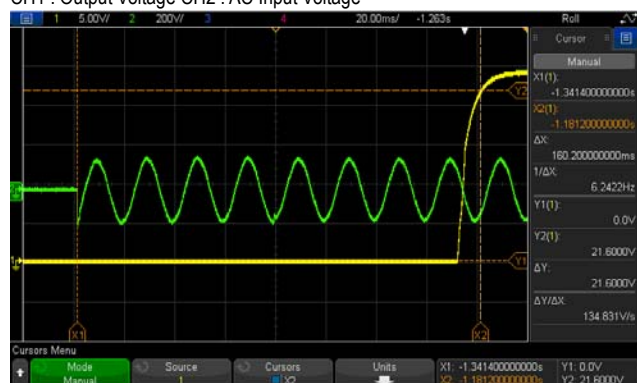
INPUT=230VAC/50HZ @ FULL LOAD

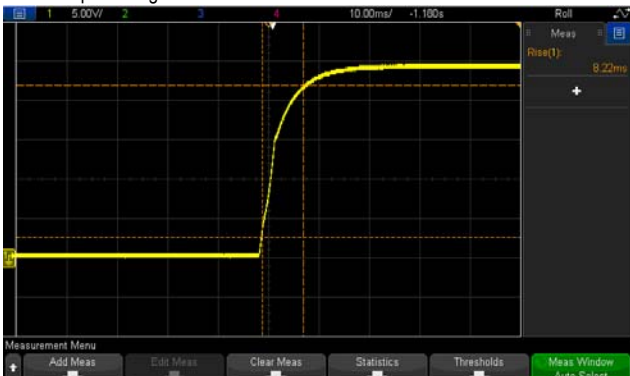
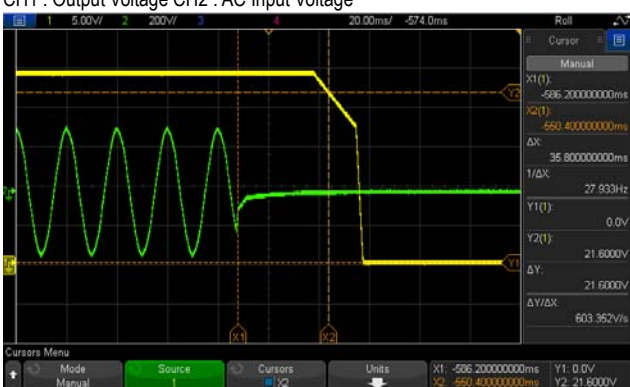
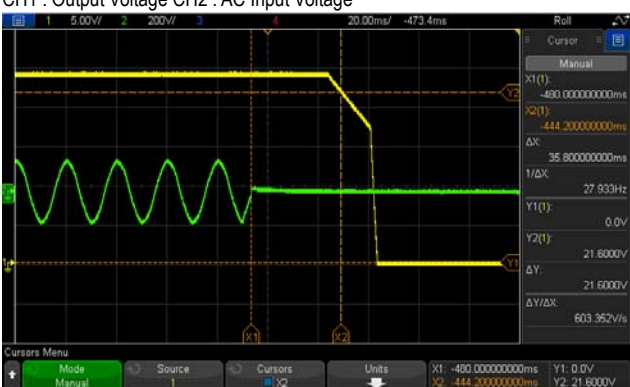
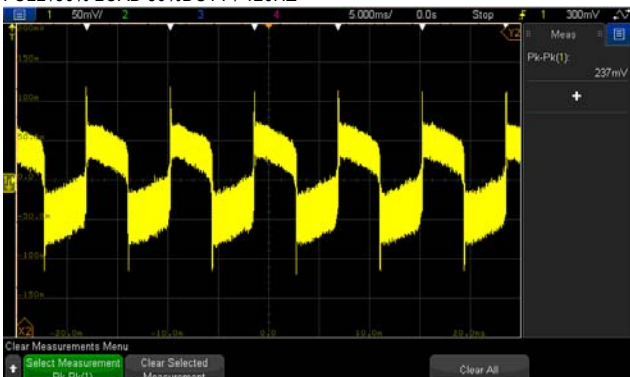
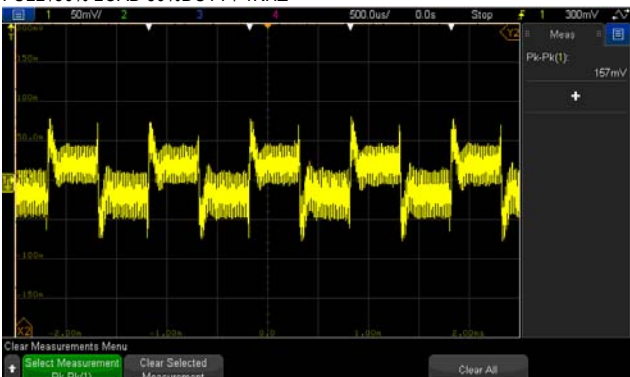
CH1 : Output Voltage CH2 : AC Input Voltage





INPUT=115VAC/60HZ @ FULL LOAD

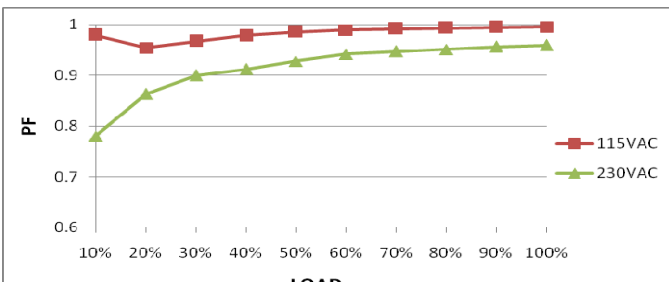
CH1 : Output Voltage CH2 : AC Input Voltage

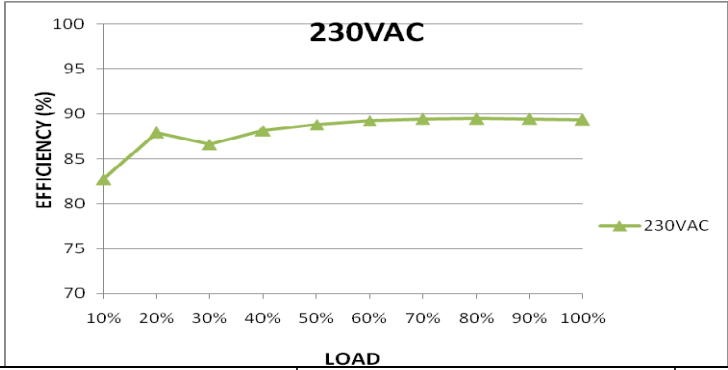
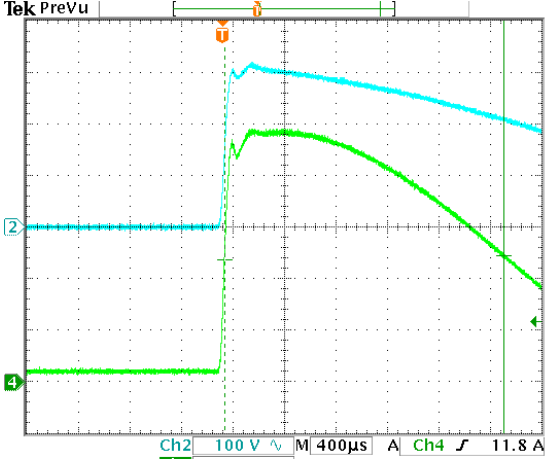
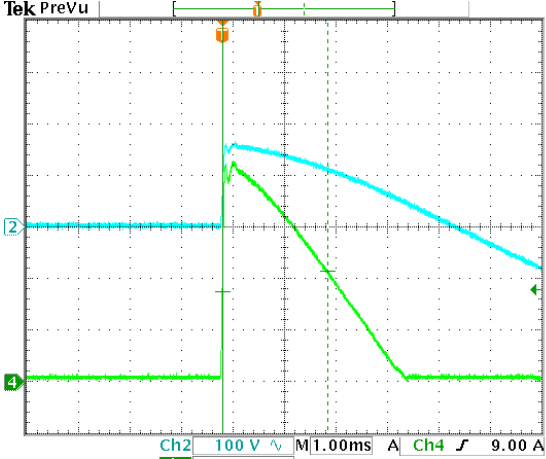


8	RISE TIME (Max)	230VAC/50ms 115VAC/50ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 8.22ms 115VAC/ 8.44 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage				
INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage				
9	HOLD UP TIME (Typ.)	230VAC/16ms 115VAC/16ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 35.8 ms 115VAC/ 35.8 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage				
INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage				
10	DYNAMIC LOAD	V1: 2400 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	237mVp-p 157mVp-p
FULL /50% LOAD 50%DUTY / 120HZ				
FULL /50% LOAD 50%DUTY / 1KHZ				
11	PEAK POWER	NO DAMAGE	I/P : 230 VAC O/P:TESTING Ta:25°C	TEST:OK

		$P_{out} = \frac{P_{avg} \times t + P_{pk} \times (T-t)}{T} \leq P_{max}$ P_{avg}: Average output power (W) P_{pk}: Peak output power (W) P_{non}: Non-peak output power (W) P_{max}: Rated output power (W) t: Peak power width (sec) T: Period (sec)   For example (12V model): $V_{in} = 100V$ Duty_max = 25% $P_{max} = 630W$ $P_{non} = 1200W$ $t \leq 5 \text{ sec}$ $T \geq 20 \text{ sec}$ $P_{out} = \frac{P_{avg} \times t + P_{pk} \times (T-t)}{T} \leq \frac{1200 \times 5 + P_{non} \times (20-5)}{20} \leq 630W$ $P_{non} \leq 448W$		
--	--	--	--	--

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC 120VDC~ 370VDC	(1) I/P: TESTING O/P: FULL LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 50% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 50% LOAD Ta: 25°C	(1) 78.5V~264V (2) 106.95Vdc~370Vdc/FULL LOAD 107.07Vdc~370Vdc/50% LOAD (3) 106.95Vdc~370Vdc/FULL LOAD 107.07Vdc~370Vdc/50% LOAD
			I/P: LOW-LINE-3V=82V HIGH-LINE+15%=300V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (Power ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85 VAC ~264 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 3.6 A 115V/ 7.6A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=3.28A/ 230VAC I=6.46A/ 115VAC
4	LEAKAGE CURRENT	< 1.5mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	1.13mA
6	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9588/230VAC PF=0.9935/115VAC
	P.F vs LOAD 			

7	EFFICIENCY(Typ.)	88%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	89.4%
EFFICIENCY vs LOAD 				
8	INRUSH CURRENT(Typ.)	230V/70A 115V/35A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=49.2A/ 230VAC I=21.5A/ 115VAC
INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current  INPUT=115VAC/ 60HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current 				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 %~ 200 % /5S 280% LOAD > 5s	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	109.2%/ 264VAC 109.8%/ 230VAC 109.8%/100VAC 5S TEST: OK PROTECTION TYPE : Normally works within 105%~200% rated power for more than 5seconds and than shut down o/p voltage, re-power on to recover ; Constant current limiting for output power >280% rated for more than 5seconds and than shut down o/p voltage, re-power on to recover

2	OVER VOLTAGE PROTECTION	30V~34.8V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	33.8V/ 264VAC 33.6V/ 230VAC 33.6V/ 85VAC PROTECTION TYPE : Shut down o/p voltage , re-power on to recover .
3	OVER TEMPERATURE PROTECTION	Protection type : Shut down o/p voltage , recovers automatically after temperature goes down .	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage , recovers automatically after temperature goes down .
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, and shut down after 5 seconds , re-power on to recover .

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT						
1	REMOTE SENSE	S+ / S- >0.3V Compensate voltage drop on the load wiring up to 0.5V.	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	0.336V						
2	DC OK SIGNAL	High (3.3 ~ 5.6V) :PSU turn on Low (0 ~ 1V) : PSU turn off. I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result : <table><tr><th>Vout</th><th>DC OK SIGNAL</th></tr><tr><td>PSU turn on</td><td>5.186V</td></tr><tr><td>PSU turn off</td><td>0V</td></tr></table>			Vout	DC OK SIGNAL	PSU turn on	5.186V	PSU turn off	0V
Vout	DC OK SIGNAL									
PSU turn on	5.186V									
PSU turn off	0V									
3	FAN ON/OFF CONTROL	Load 35±15% or RTH2≥50°C FAN ON	I/P: 230 VAC O/P:TESTING	<table><tr><td></td><td>RTH(°C)</td><td>LOAD(%)</td></tr><tr><td>FAN ON</td><td>OK</td><td>22.4%</td></tr></table>		RTH(°C)	LOAD(%)	FAN ON	OK	22.4%
	RTH(°C)	LOAD(%)								
FAN ON	OK	22.4%								

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 3/Q4 Rated : 32A/ 650 V VGS: ± 25 V	AC ON/OFF I/P: High-Line =300V VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. Ta:25°C	Q3 Q4 VDS: VDS: (1) 553V (1) 543V (2) 597V (2) 581V (3) 549V (3) 534V (4) 549V (4) 559V (5) 549V (5) 547V (6) 549V (6) 534V (7) 593V (7) 593V

2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 34 A/ 600 V VGS: ± 25 V	I/P: High-Line =267V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	Q1 VDS: (1) 438V (2) 430V (3) 430V (4) 434V (5) 438V (6) 426V (7) 466V
3	P.F.C DIODE	D1 Rated : 6A/ 650 V	I/P: High-Line =300V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1) 405V (2) 424V (3) 405V (4) 405V
4	Diode Peak Voltage	Q101 Rated : 200V/20A Q104 Rated : 200V/20A	AC ON/OFF I/P: High-Line =300V VOmax O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD VO: O/P: (1)Full Load Ta:25°C	Q101: VOmax VDS: (1) 118.6V (2) 122.6V (3) 124.2V (4) 124.1V (5) 124.1V (6) 123.3V (7) 134.1V (8) 116.9V VO: (1) 119V Q104: VOmax VDS: (1) 137V (2) 148V (3) 136V (4) 138V (5) 138V (6) 136V (7) 152V (8) 130.5V VO: (1) 136V
5	Input Capacitor Voltage	C5 Rated: : 680 μ / 400 V	I/P High-Line =300V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1) 397V (2) 396V (3) 396V (4) 396V
6	Control IC Voltage Test	PWM IC U1 Rated 11V~ 30 V O/P IC U202/ U203 Rated -0.3 V~ 30 V	AC ON/OFF I/P: High-Line =300V O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(LOW LINE) Ta:25°C	U1 (1) 16.4V (2) 16.6V (3) 16.6V (4) 15.0V (5) 14.4V U202/U203 (1) 12.4V

			(2) 12.4V (3) 12.4V (4) 12.0V (5) 12.0V
--	--	--	--

SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:0.6 KVAC/min Ta:25℃	I/P-O/P:8.27mA I/P-FG:9.18mA O/P-FG:4.56mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25℃	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25℃	5 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25℃	PASS
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25℃	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25℃	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR: 8KV / Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25℃	CRITERIA A
5	E.F.T	EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25℃	CRITERIA A
6	SURGE	IEC61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25℃	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : HRP-600N-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 25.0 ℃ 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 50.0℃		

NO	Position	ROOM AMBIENT Ta= 25.0 °C	HIGH AMBIENT Ta= 50.0 °C
1	ZNR1	26.0°C	51.8°C
2	LF1	28.6°C	55.0°C
3	C61	27.2°C	53.2°C
4	U1	29.4°C	55.4°C
5	C5	30.8°C	56.8°C
6	RTH1	26.6°C	52.3°C
7	RY1	34.3°C	60.9°C
8	C10	31.5°C	57.8°C
9	BD1	49.7°C	75.5°C
10	Q1	42.0°C	68.1°C
11	TSW1	35.2°C	61.8°C
12	L3	35.2°C	62.3°C
13	D1	48.4°C	75.1°C
14	T1coil	60.9°C	88.4°C
15	T1core	50.7°C	78.1°C
16	Q103	58.9°C	84.1°C
17	Q100	69.5°C	96.2°C
18	Q102	63.0°C	89.8°C
19	Q105	61.6°C	86.6°C
20	T2	29.2°C	55.2°C
21	Q4	46.9°C	74.8°C
22	D22	40.6°C	67.2°C
23	RTH2	31.9°C	58.5°C
24	RG1	42.1°C	69.2°C
25	U202	32.0°C	58.2°C
26	C106	37.5°C	64.6°C
27	C108	35.1°C	62.1°C
28	L100	57.5°C	85.7°C
29	J115	53.4°C	80.1°C
30	R106	68.1°C	96.1°C
31	R100	69.3°C	99.7°C
32	D30	36.0°C	62.4°C
33	Q19	32.8°C	58.5°C

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 114 % LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -45 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C /95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK

5	TEMPERATURE COEFFICIENT	$\pm 0.03 \text{ }^{\circ}\text{C} (0\sim 50^{\circ}\text{C})$	I/P : 230 VAC O/P : FULL LOAD	$\pm 0.0047 \text{ }^{\circ}\text{C} (0\sim 50^{\circ}\text{C})$
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~+90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~+55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 6G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME		(1) 1545112.9HRS (2) 236139.6HRS (3) 307676.9HRS (4) 385525.8HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 452.04K hrs min. Telcordia TR/SR-332 (Bellcore) ; 191.26K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure :50,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

2018.4.30 GP-A50-F010