



Test Report: NSP-750-12

750W AC/DC High Reliable Multi-Industries Enclosed
Type Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

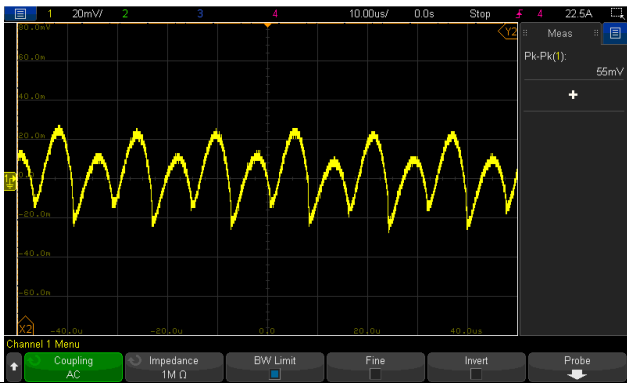
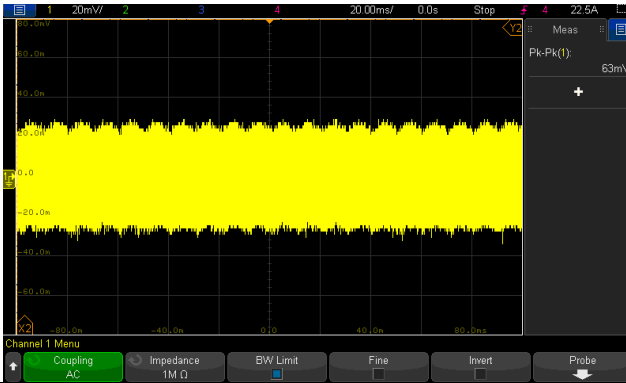
E.M.C. Test

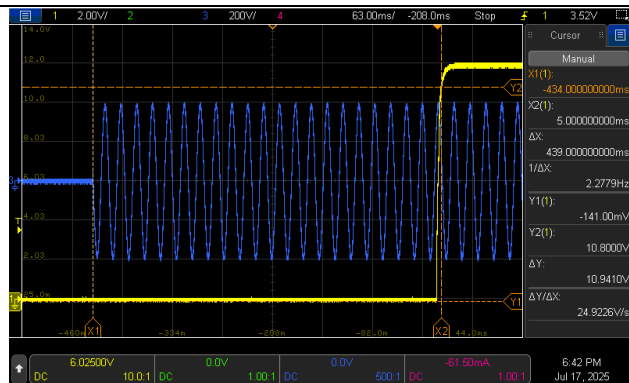
■ RELIABILITY TEST

ENVIRONMENT TEST

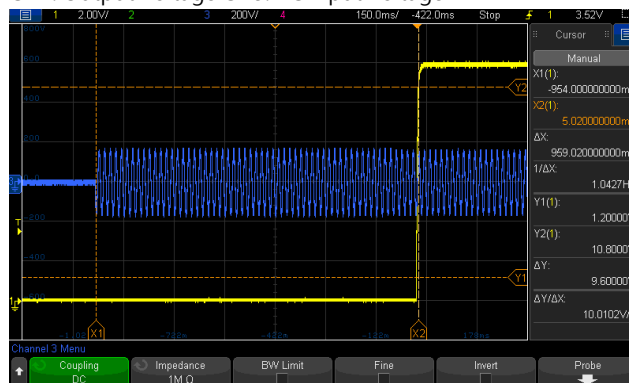
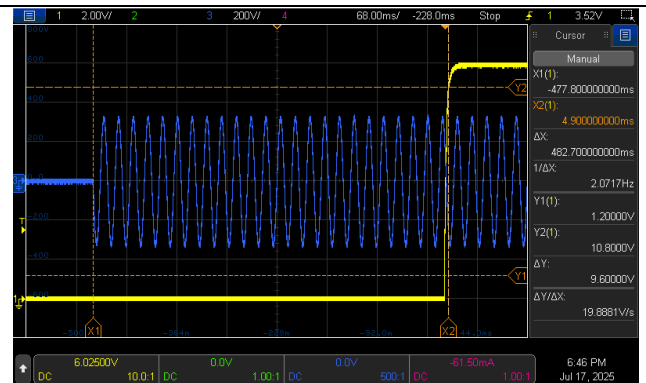
■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 10.8V~14V	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	10.44V~14.56V/277VAC 10.44V~14.56V/230VAC 10.44V~14.56V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -2% ~ +2%	I/P: 85VAC~305VAC O/P:FULL~MIN. LOAD Ta:25°C	V1: -0.07% ~ 0.09%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: 0% ~ 0.02%
4	LOAD REGULATION	V1: -0.5% ~ +0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.07% ~ 0.09%
5	OVER/UNDERSHOOT TEST	<± 5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD Ta:25°C	4.1%
6	RIPPLE & NOISE (Max)	V1: 200mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	55mVp-p / high frequency 63mVp-p / low frequency
high frequency :  low frequency : 				
7	SET UP TIME(Max)	277VAC/900ms 230VAC/1000ms 115VAC/1500ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/439ms 230VAC/482.7ms 115VAC/959ms
INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage			INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage	

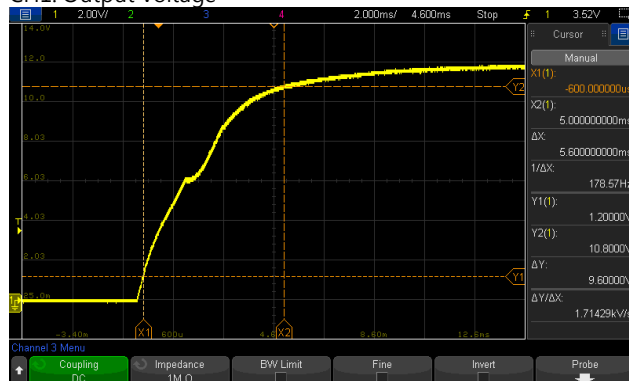


INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage CH3: AC Input Voltage



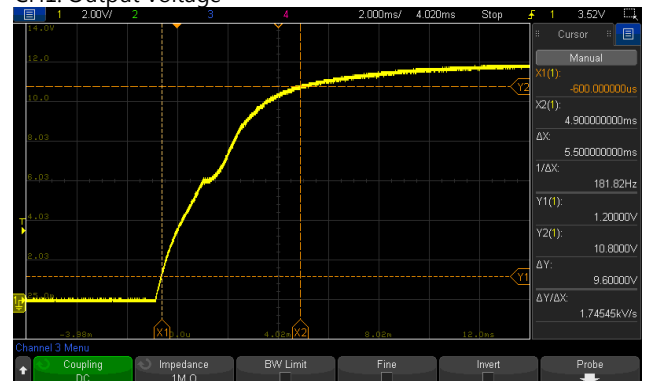
8	RISE TIME (Max) 277VAC/80ms 230VAC/80ms 115VAC/80ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/5.6ms 230VAC/5.5ms 115VAC/5.64ms
---	--	---	---

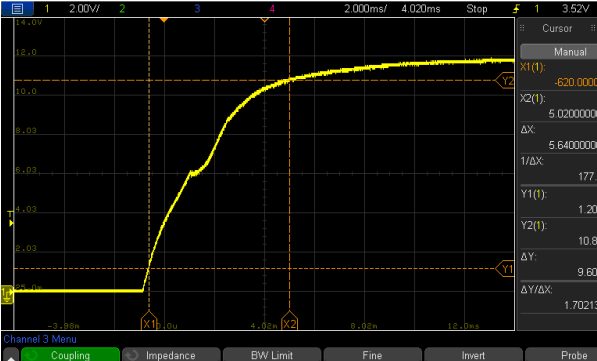
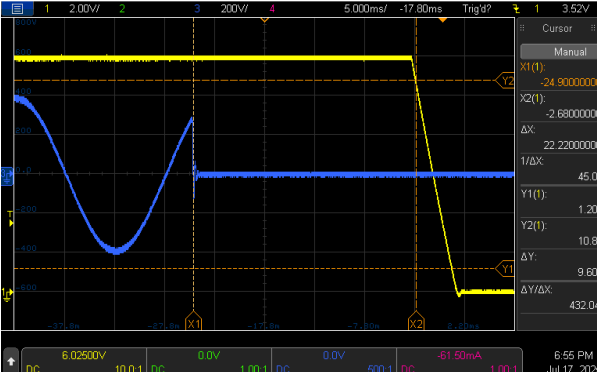
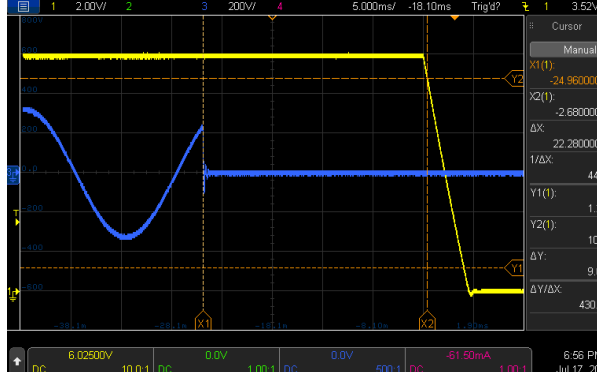
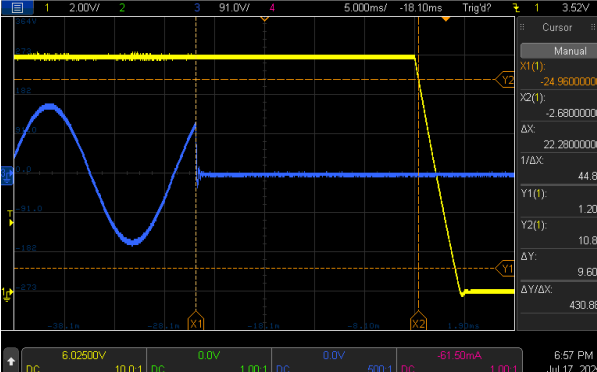
INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

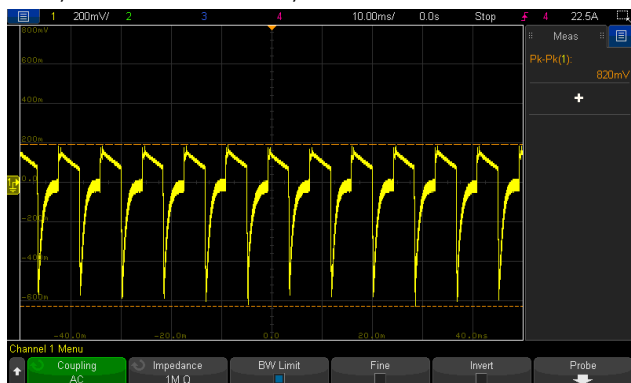
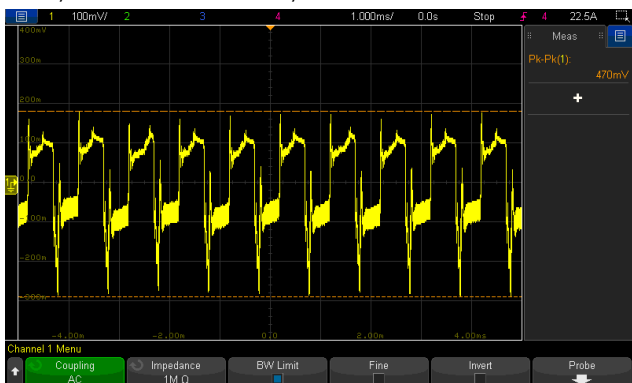


INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage


INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage

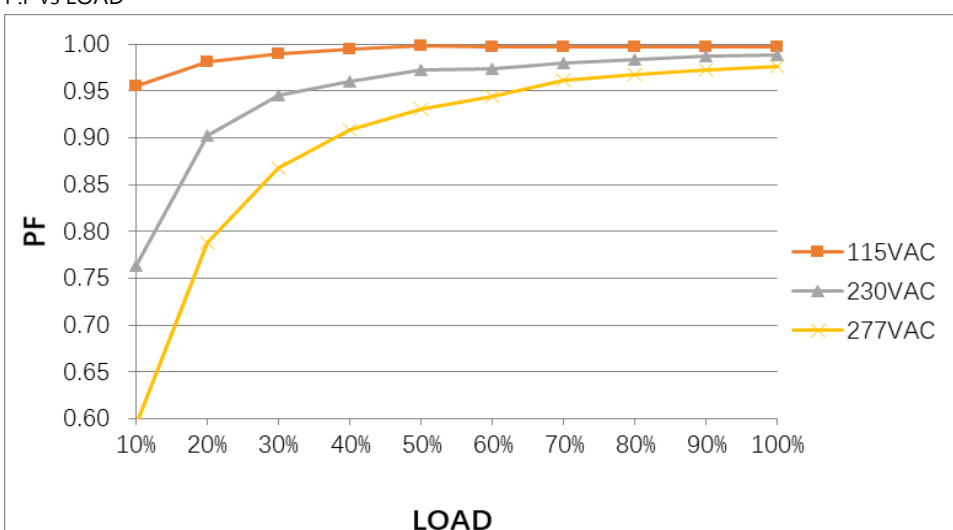
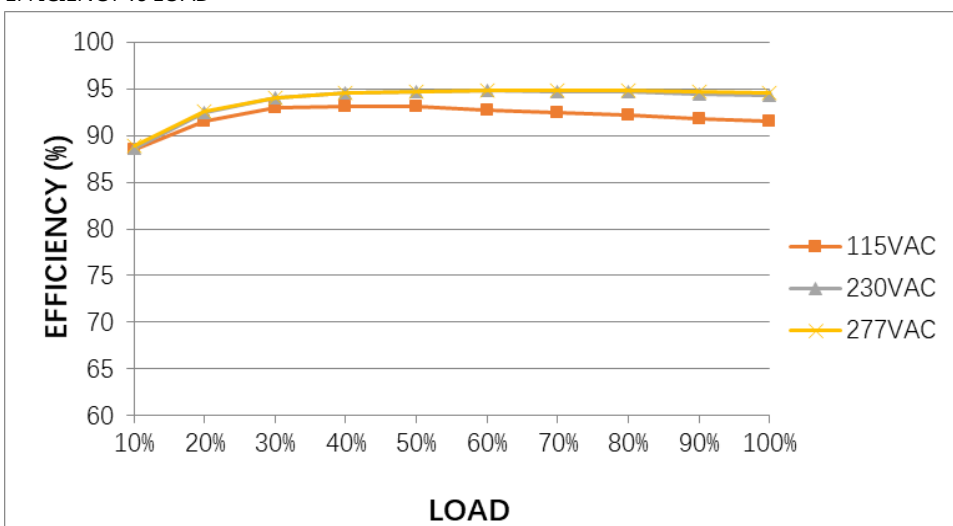


				
9	HOLD UP TIME (Typ.)	277VAC/16ms 230VAC/16ms 115VAC/16ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/22.22ms 230VAC/22.28ms 115VAC/22.28ms
	INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 			
	INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 			
	INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 			
10	DYNAMIC LOAD	V1: 1200mVp-p	I/P: 230VAC O/P: (1) FULL/ MIN LOAD 50%DUTY / 120HZ (2) FULL/ MIN LOAD 50%DUTY / 1KHZ Ta:25°C	820mVp-p 470mVp-p

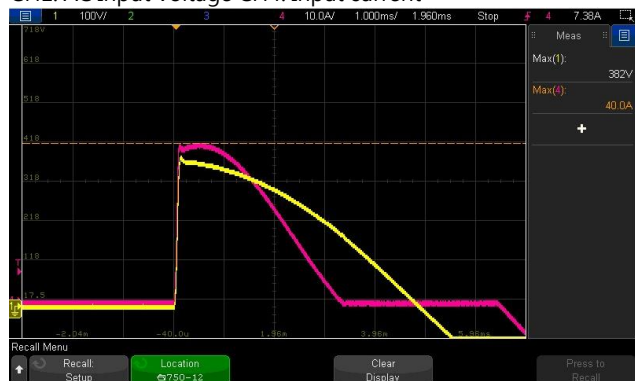
FULL / MIN LOAD 50%DUTY / 120HZ		FULL / MIN LOAD 50%DUTY / 1KHZ		
				
11	TRANSIENT RECOVERY TIME	V1: 1200mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	507mVp-p

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT						
1	INPUT VOLTAGE RANGE	85VAC~305VAC 120VDC~ 431VDC ■ Output Derating vs. Input Voltage 	(1) I/P: TESTING O/P: FULL / 80% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 80% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 80% LOAD Ta:25°C I/P: HIGH-LINE+10V=315V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 82V~305V/ FULL LOAD 82V~305V/ 80% LOAD (2) 109Vdc~431Vdc/FULL LOAD 109Vdc~431Vdc/80% LOAD (3) 109Vdc~431Vdc/FULL LOAD 109Vdc~431Vdc/80% LOAD TEST : OK						
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85VAC~ 305VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK						
3	INPUT CURRENT (Typ.)	277V/ 3.2 A 230V/ 3.9 A 115V/ 8.2 A	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =2.94A/ 277VAC I =3.51A/ 230VAC I =7.27A/ 115VAC						
4	LEAKAGE CURRENT	Earth leakage current < 350uA (rms)@277Vac touch current<100uA(rms) @ 277Vac	I/P : 277 VAC/60HZ O/P : Min LOAD Ta : 25°C	For Earth: 201.2uA For touch: 27.6uA						
5	NO LOAD CONSUMPTION	Remote Power OFF: 0.75W/115Vac 0.75W/230Vac 1W/277Vac	I/P : 115VAC I/P : 230VAC I/P : 277VAC O/P : NO LOAD Ta : 25°C	TEST: <table><tr><td></td><td>Remote Power OFF</td><td>Remote Power ON</td></tr><tr><td>115VAC</td><td>0.97W</td><td>4.06W</td></tr></table>		Remote Power OFF	Remote Power ON	115VAC	0.97W	4.06W
	Remote Power OFF	Remote Power ON								
115VAC	0.97W	4.06W								

		Remote Power ON: 5W/115Vac 5W/230Vac 5W/277Vac		<table><tr><td>230VAC</td><td>1.11W</td><td>3.82W</td></tr><tr><td>277VAC</td><td>1.21W</td><td>3.47W</td></tr></table>	230VAC	1.11W	3.82W	277VAC	1.21W	3.47W																																						
230VAC	1.11W	3.82W																																														
277VAC	1.21W	3.47W																																														
6	POWER FACTOR (Typ.)	0.90/ 277VAC 0.93/ 230VAC 0.98/115VAC	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9791/277VAC PF=0.9875/230VAC PF=0.9977/115VAC																																												
P.F vs LOAD  <table><caption>Approximate Power Factor (PF) vs Load</caption><thead><tr><th>LOAD</th><th>115VAC</th><th>230VAC</th><th>277VAC</th></tr></thead><tbody><tr><td>10%</td><td>0.95</td><td>0.75</td><td>0.60</td></tr><tr><td>20%</td><td>0.98</td><td>0.90</td><td>0.78</td></tr><tr><td>30%</td><td>0.99</td><td>0.95</td><td>0.88</td></tr><tr><td>40%</td><td>1.00</td><td>0.97</td><td>0.92</td></tr><tr><td>50%</td><td>1.00</td><td>0.98</td><td>0.95</td></tr><tr><td>60%</td><td>1.00</td><td>0.98</td><td>0.97</td></tr><tr><td>70%</td><td>1.00</td><td>0.98</td><td>0.98</td></tr><tr><td>80%</td><td>1.00</td><td>0.98</td><td>0.98</td></tr><tr><td>90%</td><td>1.00</td><td>0.98</td><td>0.98</td></tr><tr><td>100%</td><td>1.00</td><td>0.98</td><td>0.98</td></tr></tbody></table>					LOAD	115VAC	230VAC	277VAC	10%	0.95	0.75	0.60	20%	0.98	0.90	0.78	30%	0.99	0.95	0.88	40%	1.00	0.97	0.92	50%	1.00	0.98	0.95	60%	1.00	0.98	0.97	70%	1.00	0.98	0.98	80%	1.00	0.98	0.98	90%	1.00	0.98	0.98	100%	1.00	0.98	0.98
LOAD	115VAC	230VAC	277VAC																																													
10%	0.95	0.75	0.60																																													
20%	0.98	0.90	0.78																																													
30%	0.99	0.95	0.88																																													
40%	1.00	0.97	0.92																																													
50%	1.00	0.98	0.95																																													
60%	1.00	0.98	0.97																																													
70%	1.00	0.98	0.98																																													
80%	1.00	0.98	0.98																																													
90%	1.00	0.98	0.98																																													
100%	1.00	0.98	0.98																																													
7	EFFICIENCY(Typ.)	92%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	93.5%																																												
EFFICIENCY vs LOAD  <table><caption>Approximate Efficiency (%) vs Load</caption><thead><tr><th>LOAD</th><th>115VAC</th><th>230VAC</th><th>277VAC</th></tr></thead><tbody><tr><td>10%</td><td>88</td><td>88</td><td>88</td></tr><tr><td>20%</td><td>92</td><td>93</td><td>93</td></tr><tr><td>30%</td><td>93</td><td>94</td><td>94</td></tr><tr><td>40%</td><td>93</td><td>95</td><td>95</td></tr><tr><td>50%</td><td>93</td><td>95</td><td>95</td></tr><tr><td>60%</td><td>93</td><td>95</td><td>95</td></tr><tr><td>70%</td><td>92</td><td>95</td><td>95</td></tr><tr><td>80%</td><td>92</td><td>95</td><td>95</td></tr><tr><td>90%</td><td>92</td><td>95</td><td>95</td></tr><tr><td>100%</td><td>92</td><td>95</td><td>95</td></tr></tbody></table>					LOAD	115VAC	230VAC	277VAC	10%	88	88	88	20%	92	93	93	30%	93	94	94	40%	93	95	95	50%	93	95	95	60%	93	95	95	70%	92	95	95	80%	92	95	95	90%	92	95	95	100%	92	95	95
LOAD	115VAC	230VAC	277VAC																																													
10%	88	88	88																																													
20%	92	93	93																																													
30%	93	94	94																																													
40%	93	95	95																																													
50%	93	95	95																																													
60%	93	95	95																																													
70%	92	95	95																																													
80%	92	95	95																																													
90%	92	95	95																																													
100%	92	95	95																																													
8	INRUSH CURRENT(Typ.)	277V/50A 230V/40A 115V/20A COLD START	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =40.0A/ 277VAC I =32.7A/ 230VAC I =15.6A/ 115VAC T50= 2040us/230V																																												

INPUT=277VAC/50HZ @ FULL LOAD
CH1: AC Input Voltage CH4: Input current



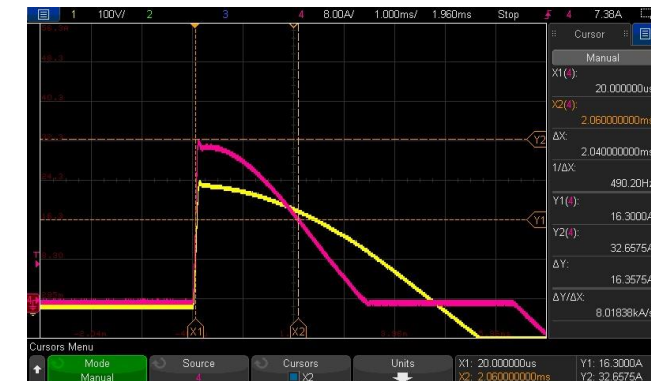
INPUT=230VAC/50HZ @ FULL LOAD
CH1: AC Input Voltage CH4: Input current



INPUT=115VAC/ 60HZ @ FULL LOAD
CH1: AC Input Voltage CH4: Input current



T50@230VAC:




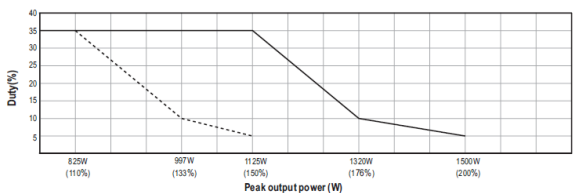
PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	Protection type: Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown($V_{out} > 30\%$), recovers automatically after fault condition is removed, or shut down o/p voltage when $V_{out} < 30\%$, AC re-power on to recover. Protection type: >200% rated power, constant current limiting ($V_{out} > 30\%$)with auto-recovery after fault condition is removed, or shut down o/p voltage when $V_{out} < 30\%$,AC re-power on to recover.	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	TEST : 124.6%/305VAC 124.6%/230VAC 124.6%/100VAC Protection type: Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown($V_{out} > 30\%$), recovers automatically after fault condition is removed, or shut down o/p voltage when $V_{out} < 30\%$, AC re-power on to recover. 226.2%/305VAC 226.2%/230VAC 200.0%/100VAC Protection type: >200% rated power, constant

				current limiting (Vout>30%)with auto-recovery after fault condition is removed, or shut down o/p voltage when Vout<30%, AC re-power on to recover.
2	OVER VOLTAGE PROTECTION	15V~ 19V Protection type: Shut down o/p voltage, AC re-power on to recover	I/P: 305VAC I/P: 85VAC O/P:MIN LOAD Ta:25°C	17.1V/ 305VAC 17.1V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, AC re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovery automatically after temperature goes down	I/P: 305VAC I/P: 85VAC O/P:FULL LOAD	TEST: <u>OK</u> O.T.P Active Protection type : Shut down o/p voltage, recovery automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Constant current limiting for more than 5 seconds (Vout<30%) and then shut down o/p voltage, AC re-power on to recover or Hiccup mode ,recovery automatically after fault conditon is removed. Depends on the user's wire impedance	I/P: 305VAC I/P: 85VAC O/P:FULL LOAD	NO DAMAGE PROTECTION TYPE : Constant current limiting for more than 5 seconds (Vout<30%) and then shut down o/p voltage, AC re-power on to recover or Hiccup mode ,recovery automatically after fault conditon is removed. Depends on the user's wire impedance

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT									
1	AUXILIARY POWER (AUX)	1. 5Vaux @ 0.2A, Tolerance -15% ~ +15% at main output 20% rated current; 2. 12Vaux @ 0.8A, Tolerance -15% ~ +15% at main output 20% rated current. I/P: 230 VAC O/P:20% LOAD Ta:25°C Test Result : <table><tr><td>AUX</td><td>TOLERANCE</td><td>RIPPLE</td></tr><tr><td>5V / 0.2A</td><td>-1.618% ~ 0%</td><td>24mVp-p</td></tr><tr><td>12V / 0.8A</td><td>-0.78% ~0%</td><td>26mVp-p</td></tr></table>	AUX	TOLERANCE	RIPPLE	5V / 0.2A	-1.618% ~ 0%	24mVp-p	12V / 0.8A	-0.78% ~0%	26mVp-p		
AUX	TOLERANCE	RIPPLE											
5V / 0.2A	-1.618% ~ 0%	24mVp-p											
12V / 0.8A	-0.78% ~0%	26mVp-p											
2	REMOTE CONTROL	Power ON: Short between Pin11 & Pin13 on CN1	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>									

		Power OFF: open between Pin11 & Pin13 on CN1		
3	REMOTE SENSE	S+ / S- compensate voltage drop on the load wiring up to 0.3V	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>
4	DC OK SIGNAL	15Vdc/10mA resistive load 	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>
5	FAN CONTROL	(1)Fan ON/OFF control: RTH3 ≥ 50°C ± 10°C FAN ON RTH3 ≤ 40°C ± 10°C FAN OFF Ta:25°C	I/P:230VAC O/P:TESTING	TEST: (1) <u>OK</u> (2) <u>44.7</u> dB
6	PEAK Power	I/P: 100/305VAC O/P:  -----100VAC ————200VAC		TEST: <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2/Q3 : Rated: 40A/600V	AC ON/OFF I/P: High-Line +3V = 308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	Q2 Q3 VDS: VDS: (1) 495V (1) 479V (2) 487V (2) 471V (3) 499V (3) 479V (4) 495V (4) 475V (5) 499V (5) 475V (6) 495V (6) 475V (7) 483V (7) 467V (8) 499V (8) 479V

2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 : Rated: 650V/32.8A	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	VDS: (1) 570V (2) 558V (3) 570V (4) 570V (5) 570V (6) 570V (7) 502V (8) 57V
3	P.F.C DIODE	D5: Rated: 60A/650V	I/P: High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 477V (2) 457V (3) 477V (4) 477V (5) 477V
4	Diode Peak Voltage	Q100 / Q104 : Rated: 60V/318A	AC ON/OFF I/P: High-Line +3V =308 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load <u>VO=Vnormal</u> O/P: (1) Full Load Ta:25°C	Q100: Q104: <u>VO=Vomax</u> <u>VO=Vomax</u> VDS: VDS: (1) 36.3V (1) 38.9V (2) 37.0V (2) 37.5V (3) 36.8V (3) 39.7V (4) 36.8V (4) 39.4V (5) 35.6V (5) 38.9V (6) 36.0V (6) 38.7V (7) 36.3V (7) 37.0 (8) 33.6V (8) 35.3 (9) 38.9V (9) 37.5V <u>VO=Vnormal</u> <u>VO=Vnormal</u> (1) 31.8V (1) 31.3V
5	Input Capacitor Voltage	C5 : Rated: 120μ /450V	I/P: High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off	(1) 445V (2) 433V (3) 441V

			(3) Full Load /Min load Change (4) Full load continue (5) Peak Load on/off (6) Peak Load continue Ta:25°C	(4) 429V (5) 441V (6) 437V	
6	Control IC Voltage Test	PWM IC U1 : Rated : 12.5V~ 27.9V PFC IC U2: Rated: 12.9V~25V IC U9: Rated: 3.1V~17V O/P IC U101: Rated: 4.75V~38V IC U103: Rated : 3~30 V	AC ON/OFF I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P. (5) No Load VR min (Low Line) Ta:25°C	U1 (1) 14.9V (2) 14.9V (3) 15.0V (4) 14.8V (5) 14.8V U2 (1) 14.2V (2) 14.2V (3) 14.2V (4) 14.2V (5) 14.2V U9 (1) 14.2V (2) 14.2V (3) 14.2V (4) 14.1V (5) 14.2V	U101 (1) 11.28V (2) 11.35V (3) 11.35V (4) 11.28V (5) 11.28V U103 (1) 11.28V (2) 11.28V (3) 11.35V (4) 11.28V (5) 11.28V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.2 K VAC/min I/P-FG : 2.1 K VAC/min O/P-FG: 1.5 KVAC/min	I/P-O/P: 4.62 KVAC/min I/P-FG: 2.52 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 2.49 mA I/P-FG: 2.81 mA O/P-FG: 1.76 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500 VDC>100MΩ I/P-FG: 500 VDC>100MΩ O/P-FG: 500 VDC >100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P: 50 GΩ I/P-FG: 50 GΩ O/P-FG: 43704 MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	9mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BSEN/EN61000-3-2(IEC61000-3-2) ,GB 17625.1 ■ CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ PASS
2	CONDUCTION	BS EN/EN55032(CISPR32), CNS 15936, GB/T 9254.1 CLASS B BS EN/EN55011 (CISPR11) CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32), CNS 15936 CLASS B, GB/T 9254.1 BS EN/EN55011 (CISPR11) CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	BS EN/EN 61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT												
1	TEMPERATURE RISE TEST	MODEL : NSP-750-12 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=25.8°C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=60.2°C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=25.8°C</th><th>HIGH AMBIENT Ta=60.2°C</th></tr><tr><td>1</td><td>ZNR1</td><td>34.9°C</td><td>71.7°C</td></tr><tr><td>2</td><td>LF1</td><td>33.7°C</td><td>70.1°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta=25.8°C	HIGH AMBIENT Ta=60.2°C	1	ZNR1	34.9°C	71.7°C	2	LF1	33.7°C	70.1°C
NO	Position	ROOM AMBIENT Ta=25.8°C	HIGH AMBIENT Ta=60.2°C													
1	ZNR1	34.9°C	71.7°C													
2	LF1	33.7°C	70.1°C													

NO	Position	ROOM AMBIENT Ta=25.8℃	HIGH AMBIENT Ta=60.2℃
3	LF2	29.7℃	66.0℃
4	C2	29.8℃	67.3℃
5	LF3	37.3℃	74.3℃
6	BD1	55.5℃	90.7℃
7	C16	34.8℃	71.7℃
8	RTH1	33.9℃	69.8℃
9	RY1	39.5℃	76.1℃
10	RTH4	45.3℃	81.2℃
11	Q1	47.1℃	83.4℃
12	D5	46.6℃	82.3℃
13	L1	49.3℃	85.1℃
14	C5	38.3℃	74.4℃
15	D6	41.6℃	77.5℃
16	C7	46.1℃	82.7℃
17	Q3	52.8℃	90.5℃
18	Q2	50.5℃	87.6℃
19	U1	52.1℃	87.5℃
20	Q5	43.5℃	79.9℃
21	T1COIL	73.3℃	110.2℃
22	T1CORE	57.0℃	92℃
23	C42	49.6℃	85.4℃
24	RTH5	65.8℃	104.2℃
25	C107	60.6℃	98.0℃
26	C105	57.5℃	94.9℃
27	C134	49.0℃	83.9℃
28	U100	65.2℃	101.8℃
29	R7	49.2℃	85.4℃
30	U2	48.5℃	85℃
31	U5	52.1℃	88.3℃
32	C97	52.7℃	89.1℃
33	D14	39.3℃	75.9℃
34	J101	59.9℃	96.1℃
35	U101	61.7℃	97.2℃
36	Q100	71.5℃	109.6℃
37	Q104	65.0℃	101.9℃
38	Q4	55.2℃	91.9℃
39	U7	43.3℃	79.4℃
40	C40	42.0℃	78.0℃
41	U110	48.8℃	84.3℃
42	U104	35.7℃	71.7℃
43	RTH3	41.1℃	76.7℃
44	PCB	51.4℃	85.8℃
45	T2	42.4℃	78.2℃
46	U111	38.8℃	74.9℃

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 124.5%LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 80%/100 %LOAD Ta= -45°C/-35°C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C/95 %R.H NO DAMAGE	I/P : 315VAC O/P : FULL LOAD Ta= 60°C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.05%/°C(0~60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.002%/°C(0~60°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	
7	THERMAL SHOCK TEST	-30~60°C	1. Thermal shock Temperature : -35°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C107 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60°C LIFE TIME		(1) 3639402HRS (2) 45817HRS (3) 263651HRS (4) 814761HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1047.1K hrs min. Telcordia SR-332 (Bellcore) ; 137.4K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangzd

2020.10.1 TAG-QA-009