


40W Triple Output Switching Power Supply

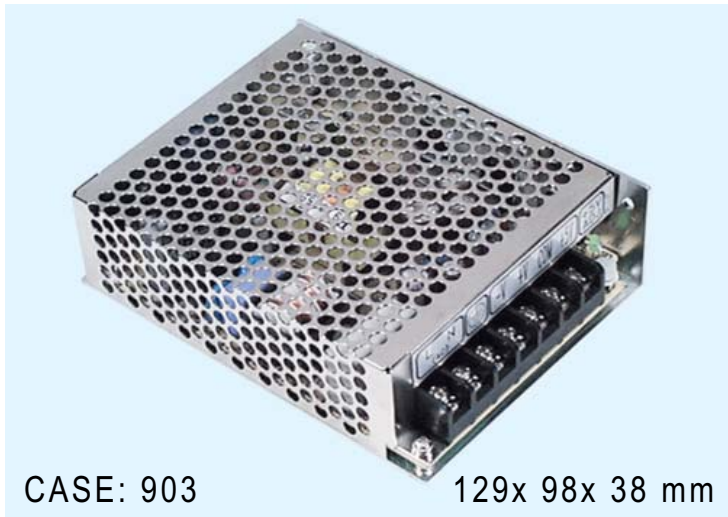

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 40kHz
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

CASE: 903 129x 98x 38 mm

AC input voltage range 85~264VAC; 120~370VDC
DC adjustment range CH1: -5~+10% rated output voltage
Overload protection 105%~150% hiccup mode, auto-recovery
Over voltage protection CH1: 115%~135% rated output voltage
Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1minute
Working temperature 0~50°C@100%, -10°C@80%, 60°C@60% load
Safety standards CSA60950-1 approved
EMC standards EN55022 class B, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11, ENV50204
Connection 7P/ 9.5mm pitch terminal block with cover
Packing 0.44kg ; 30pcs / 14.7kg / 0.86CUFT

Model No.	Output	Tol.	R&N	Effi.	Max.
T-40A	5V, 0.6~5.0A	±2%	100mV	72%	42W
	12V, 0.2~3.0A	±6%	120mV		
	-5V, 0.1~1.0A	±8%	100mV		
T-40B	5V, 0.6~5.0A	±2%	100mV	72%	45W
	12V, 0.2~3.0A	±6%	120mV		
	-12V, 0.1~1.0A	±8%	120mV		
T-40C	5V, 0.6~5.0A	±2%	100mV	72%	45W
	15V, 0.2~2.0A	±6%	120mV		
	-15V, 0.1~1.0A	±6%	120mV		