



TEST REPORT: HVG-240-48

240W Constant Voltage + Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test


E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

■ DESIGN VERIFY TEST
OUTPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	CH1: 24V~ 48V	I/P: 347 VAC O/P: FULL LOAD Ta: 25°C CV MODE TEST	0.0575V~47V /347VAC
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 44.80V ~ 51.20V	I/P : 347VAC O/P: MIN LOAD TA : 25°C	CH1: 43.21V ~ 53.14V
3	CURRENT ADJ. RANGE	CH1: 2.5 A~ 5A	I/P: 347 VAC I/P: 230VAC O/P: CV MIN & CV MAX-1V Ta: 25°C CV MODE TEST	1.761A~5.41A/347VAC@CV MAX-1V 1.682A~ 5.33A /347VAC@CV MIN 1.762A~5.4 A/230VAC@CV MAX-1V 1.682A~ 5.325A/230VAC@CV MIN
4	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 1.0% ~ -1.0%	I/P : 180VAC / 528VAC O/P: FULL / MINLOAD TA= 25°C	V1: -0.12% ~ 0.01%
5	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 180VAC / 528VAC O/P: FULL LOAD TA : 25°C	V1: -0.01% ~ -0.02%
6	LOAD REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 347VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: -0.06% ~ 0.05%
7	OVER/UNDERSHOOT TEST	< ±5%	I/P : 347VAC O/P: FULL LOAD TA : 25°C	TEST < ±5%
8	RIPPLE & NOISE(Max)	V1 : 250 mVp-p	I/P : 347VAC O/P: FULL LOAD TA : 25°C	V1 : 133 mVp-p
				<p>low frequency :</p> <p>DSO-X 3024A, MY55140424, Mon Oct 19 13:31:40 2015</p> <p>1 2 3 50ns 4 0.0s 5.000ns/div 停止</p> <p>DC +3.05000A 5.00:1 DC +29.7500V 10.0:1 AC BW 1.00:1 AC BW +147.500mV 1.00:1</p>
SET UP TIME (MAX.)	347VAC : 500ms 230VAC : 500ms 480VAC : 500ms	I/P : 347VAC I/P : 230VAC I/P : 480VAC O/P: FULL LOAD TA : 25°C	347VAC: 287ms 230VAC 307ms 480VAC 349ms	

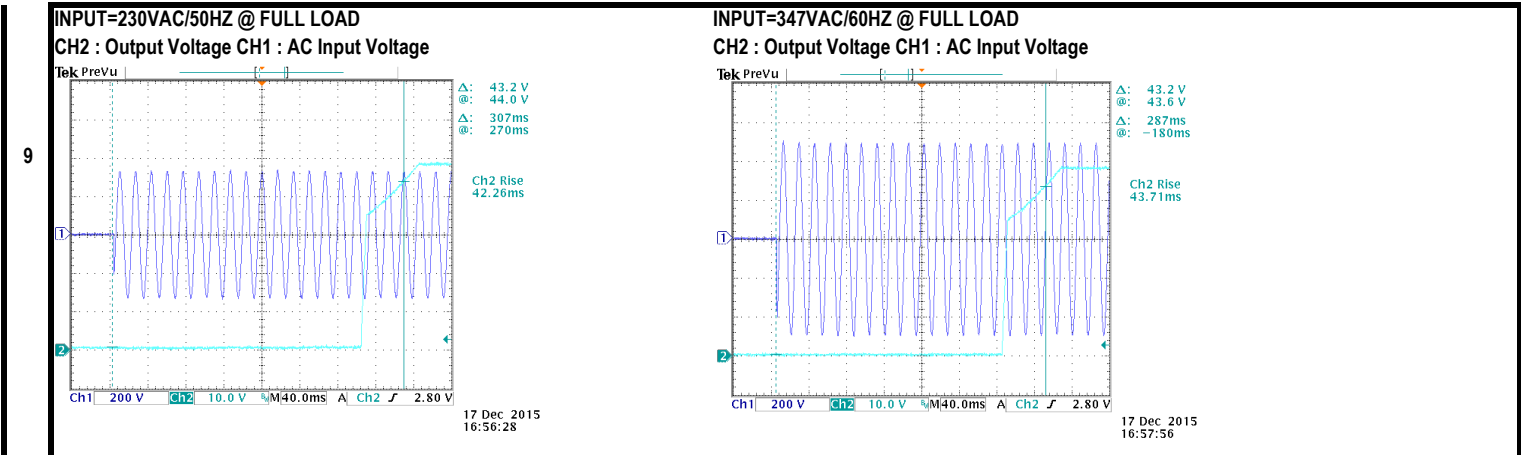


RISE TIME (MAX.)	347VAC : 150ms 230VAC : 150ms 480VAC : 150ms	I/P : 347VAC I/P : 230VAC I/P : 480VAC O/P : FULL LOAD TA : 25°C	347VAC: 42.4 230VAC 41.2 480VAC 41.2
-------------------------	--	--	--

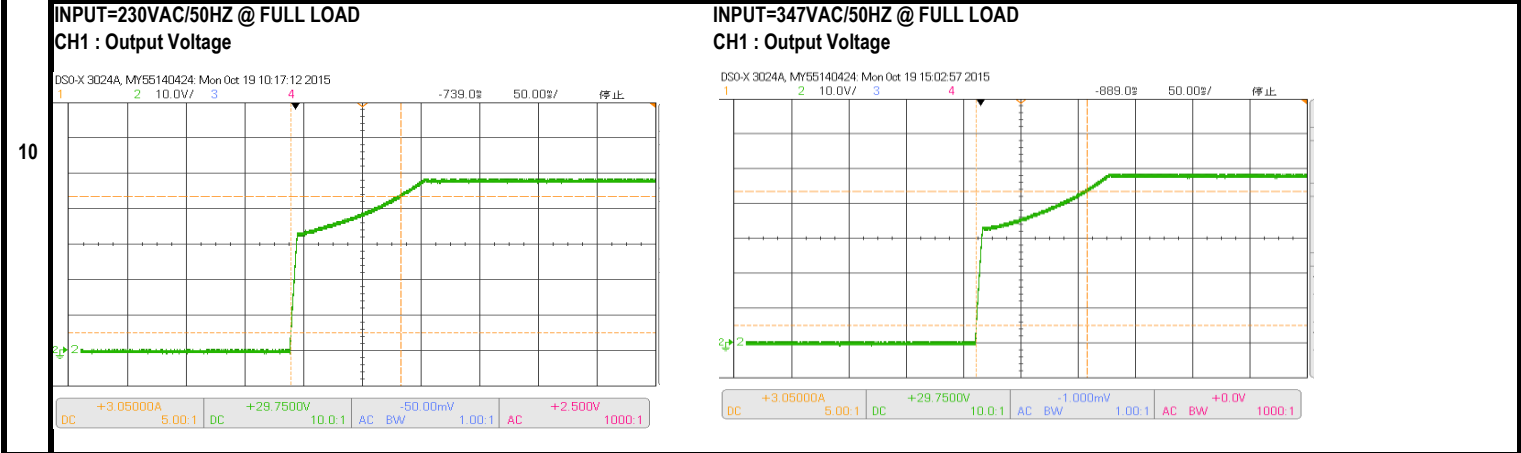

HOLD UP TIME (TYP.)	347VAC : 12ms 480VAC : 12ms	I/P : 347VAC I/P : 480VAC O/P : FULL LOAD TA : 25°C	347VAC: 25.4ms 480VAC: 25.0ms
----------------------------	--------------------------------	--	----------------------------------

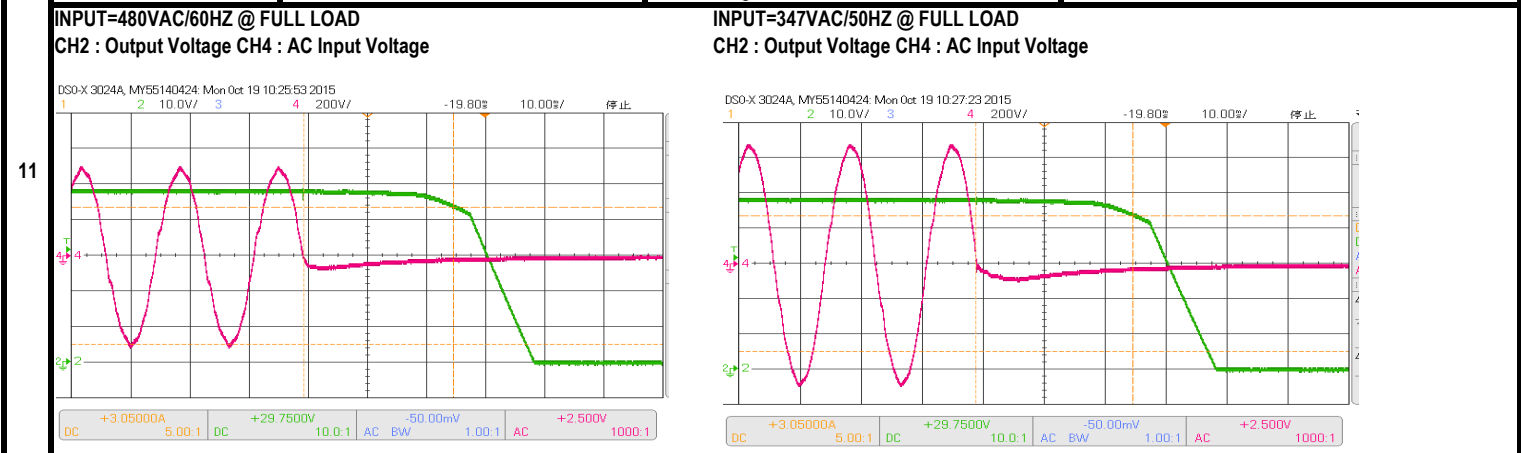


DYNAMIC LOAD	V1 : 4800 mVp-p	I/P : 347VAC O/P : (1) Full/Min load 50%duty/120HZ (2) Full/Min load 50%duty/1KHZ TA : 25°C	V1: (1). (2). 1990mv 500mv unit:mVp-p
---------------------	-----------------	---	---

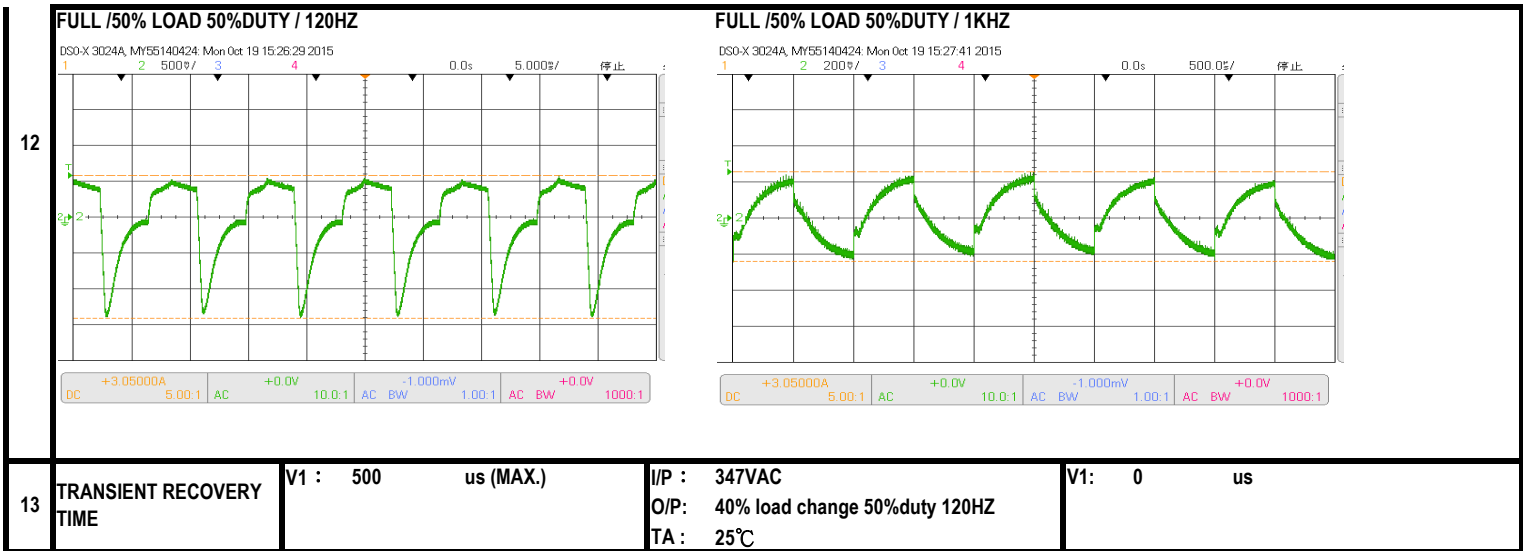


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC ~ 528VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C I/P : LOW-LINE = 177VAC HIGH-LINE = 538VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	132.0VAC ~ 528VAC TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 180VAC ~ 528VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.8 / 347VAC 0.6 / 480VAC	I/P : 347VAC I/P : 480VAC O/P : FULL LOAD TA : 25°C	I= 0.7513 / 347VAC I= 0.5553 / 480VAC
4	LEAKAGE CURRENT	< 0.75mA	I/P : 480VAC O/P : MIN LOAD TA : 25°C	L-FG: 0.36 mA N-FG: 0.37 mA
	POWER FACTOR (TYP.)	0.95 / 347VAC 0.93 / 480VAC 0.97 / 277VAC 0.98 / 230VAC	I/P : 347VAC I/P : 480VAC I/P : 277VAC I/P : 230VAC O/P : FULL LOAD TA : 25°C	PF= 0.9822 / 347VAC PF= 0.9517 / 480VAC PF= 0.989 / 277VAC PF= 0.993 / 230VAC

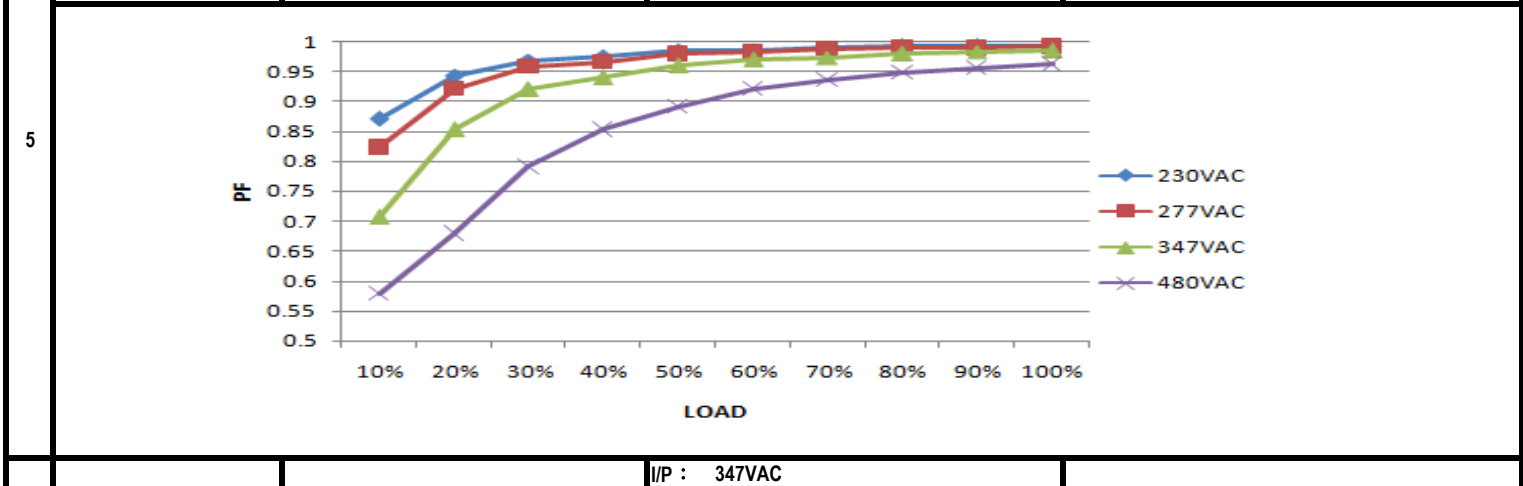

EFFICIENCY (TYP.)	92.5%	O/P: FULL LOAD TA: 25°C	93.28 %
-------------------	-------	----------------------------	---------

6

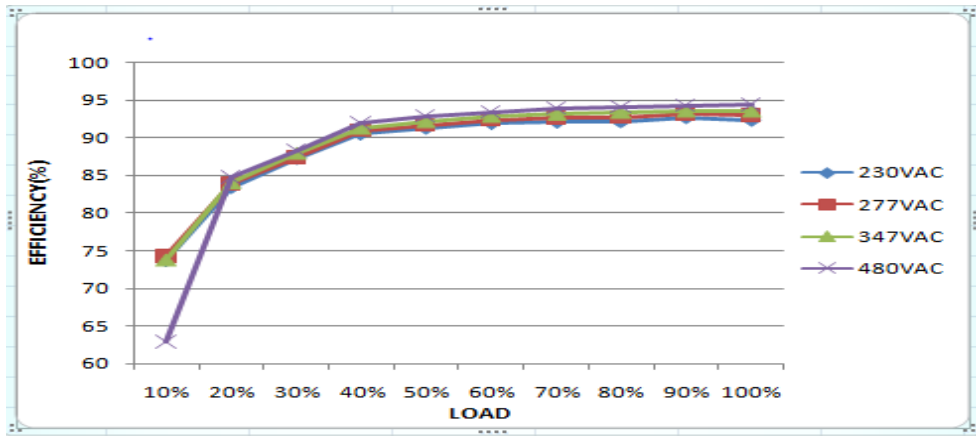


TOTAL HARMONIC DISTORTION

Total harmonic distortion will be lower than 20% when output loading is 50% or higher at 230VAC / 277VAC / 347VAC / 480VAC

I/P : 347VAC / 50% LOAD
I/P : 480VAC / 60% LOAD
TA : 25°C

THD : 14.285 347VAC
THD : 13.1 480VAC

7

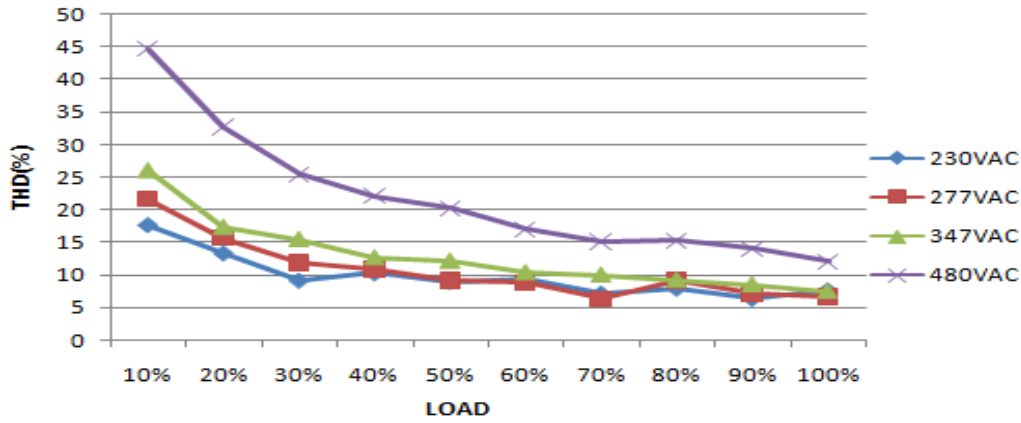

INRUSH CURRENT (TYP.)

50A / 480VAC

I/P : 480VAC

I= 41 / 480VAC

width= 532 us measured at 50% Ipeak
COLD START


O/P: FULL LOAD
TA : 25°C

T50= 532ms

8

INPUT=480VAC/50HZ @ FULL LOAD

CH4 : Input current (1V=1A) CH2 : AC Input Voltage


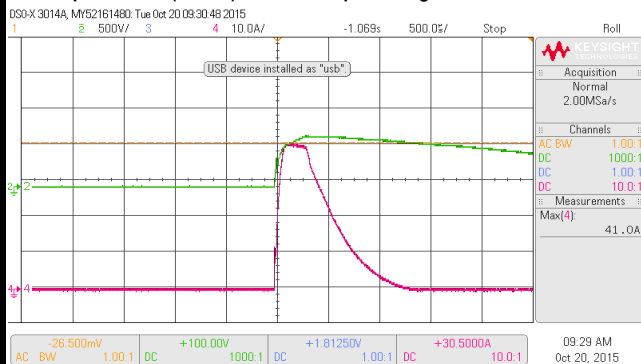


DIMMING OPERATION (for B-Type)



※ 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



○ Applying additive 0 ~ 10VDC

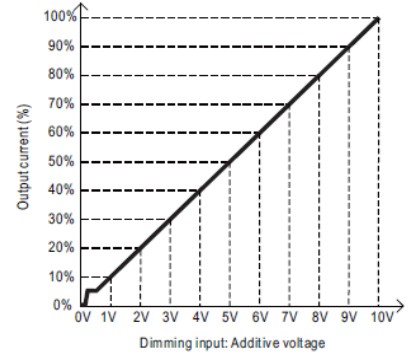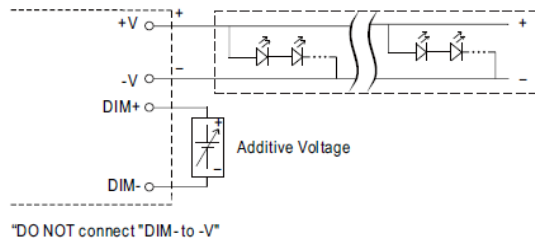

○ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

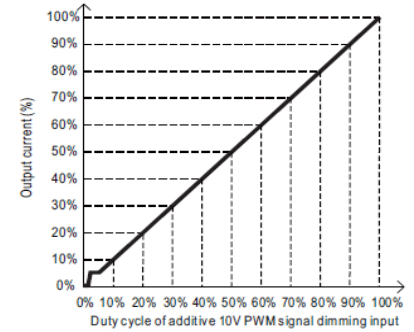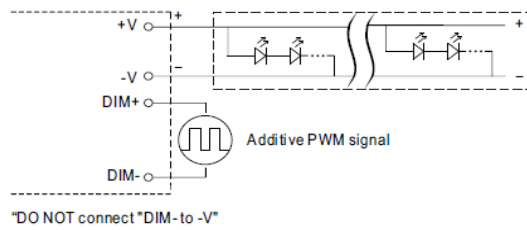

○ Applying additive resistance:

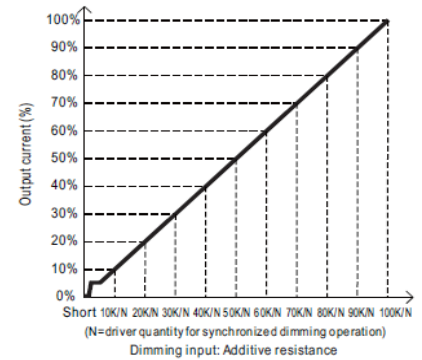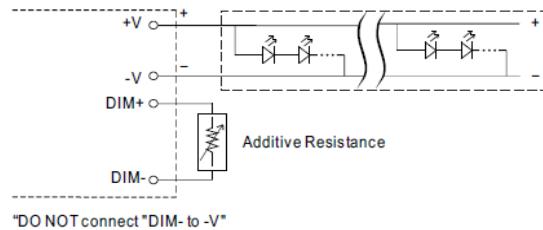

Note : 1. Min. dimming level is about 5% and the output current is not defined when 0% < Iout < 5%.


2. The output current could drop down to 0% when dimming input is about 0k Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.

48V	R	SHORT	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
	O/P CURRENT	0.00000A	0.479A	0.960A	1.440A	1.946A	2.435A	2.921A	3.415A	3.893A	4.387A	4.851A	5.178A
%	0.00%	9.58%	19.20%	28.80%	38.92%	48.70%	58.42%	68.30%	77.86%	87.74%	97.02%	103.56%	
V	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN	
O/P CURRENT	0.00000A	0.510A	1.010A	1.498A	2.012A	2.525A	3.044A	3.501A	4.024A	4.534A	5.013A	5.178A	
%	0.00%	10.20%	20.20%	29.96%	40.24%	50.50%	60.88%	70.02%	80.48%	90.68%	100.26%	103.56%	
PWM (100HZ)	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN	
O/P CURRENT	0.00000A	0.513A	1.007A	1.508A	2.029A	2.536A	3.037A	3.533A	4.033A	4.535A	5.036A	5.178A	
%	0.00%	10.26%	20.14%	30.16%	40.58%	50.72%	60.74%	70.66%	80.66%	90.70%	100.72%	103.56%	

※ Smart timer dimming function (for Dxx-Type by User definition)

MEAN WELL Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. 3 dimming profiles hereunder are defined accounting for the most frequently seen applications. If other options may be needed, please contact MEAN WELL for details.

Ex : ☉ D01-Type: the profile recommended for residential lighting

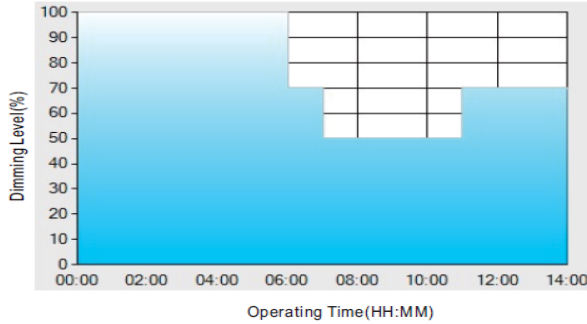

Set up for D01-Type in Smart timer dimming software program:


	T1	T2	T3	T4
TIME**	06:00	07:00	11:00	---
LEVEL**	100%	70%	50%	70%

** : TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a residential lighting application adopts D01-Type, when turning on the power supply at 6:00pm, for instance:

- [1] The power supply will switch to the constant current level at 100% starting from 6:00pm.
- [2] The power supply will switch to the constant current level at 70% in turn, starting from 0:00am, which is 06:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 50% in turn, starting from 1:00am, which is 07:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 70% in turn, starting from 5:00am, which is 11:00 after the power supply turns on. The constant current level remains till 8:00am, which is 14:00 after the power supply turns on.

Ex : ☉ D02-Type: the profile recommended for street lighting

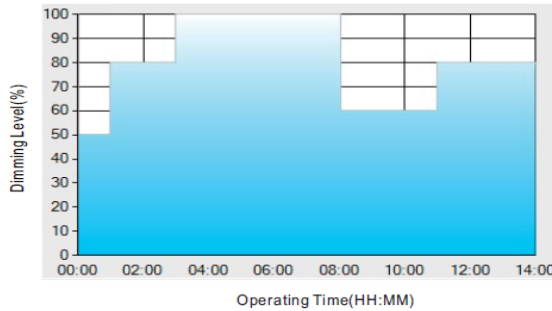

Set up for D02-Type in Smart timer dimming software program:


	T1	T2	T3	T4	T5
TIME**	01:00	03:00	8:00	11:00	---
LEVEL**	50%	80%	100%	60%	80%

** : TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a street lighting application adopts D02-Type, when turning on the power supply at 5:00pm, for instance:

- [1] The power supply will switch to the constant current level at 50% starting from 5:00pm.
- [2] The power supply will switch to the constant current level at 80% in turn, starting from 6:00pm, which is 01:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 100% in turn, starting from 8:00pm, which is 03:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 60% in turn, starting from 1:00am, which is 08:00 after the power supply turns on.
- [5] The power supply will switch to the constant current level at 80% in turn, starting from 4:00am, which is 11:00 after the power supply turns on. The constant current level remains till 6:30am, which is 14:00 after the power supply turns on.

Ex : ☉ D03-Type: the profile recommended for tunnel lighting

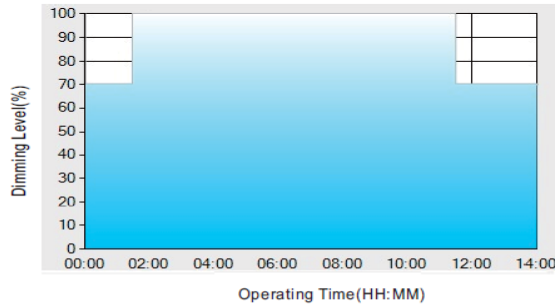

Set up for D03-Type in Smart timer dimming software program:

	T1	T2	T3
TIME**	01:30	11:00	---
LEVEL**	70%	100%	70%

** : TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a tunnel lighting application adopts D03-Type, when turning on the power supply at 4:30pm, for instance:

- [1] The power supply will switch to the constant current level at 70% starting from 4:30pm.
- [2] The power supply will switch to the constant current level at 100% in turn, starting from 6:00pm, which is 01:30 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 70% in turn, starting from 5:00am, which is 11:00 after the power supply turns on. The constant current level remains till 6:30am, which is 14:00 after the power supply turns on.

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95% ~ 108%	I/P: 528VAC I/P: 180VAC O/P: TESTING TA: 25°C	104.4% /528VAC 104.4% /180 VAC Constant Current Limiting
2	OVER VOLTAGE PROTECTION	55.00V ~ 63.00V	I/P: 528VAC I/P: 180VAC O/P: MIN LOAD TA: 25°C	528VAC 58.86 V 180VAC 58.69 V Shut down Re- power ON
3	OVER TEMPERATURE PROTECTION	Shut down Re- power ON	I/P: 347VAC O/P: FULL LOAD	O.T.P. Active Shut down Re- power ON
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 528VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Constant Current Limiting

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q901 Rated : 950V 9.0A	I/P : 531VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue (4)Dynamic Load Full/Min Load 90%Duty/1KHz (5)Dynamic Load Full/Min Load 90%Duty/5KHz (6)Dynamic Load Full/Min Load 50%Duty/120Hz (7)0%→400% Load Ta : 25°C	VIN: 531VAC VDS: (1). 863.0V (2). 920.0V (3). 799.0V (4). 863.0V (5). 863.0V (6). 871.0V (7). 904.0V
2	O/P Diode (MOSFET)	Q102 Rated : 150V 117.0A Q101 Rated : 150V 117.0A	I/P : 531VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue (4)Dynamic Load Full/Min Load 90%Duty/1KHz (5)Dynamic Load Full/Min Load 90%Duty/5KHz (6)Dynamic Load Full/Min Load 50%Duty/120Hz (7)0%→400% Load (8) NO LOAD Ta : 25°C	Q102 Q101 VDS : VDS: (1). 123.0V 121.0V (2). 42.1V 35.7V (3). 110.5V 110.5V (4). 123.0V 127.0V (5). 123.0V 121.0V (6). 127.0V 125.0V (7). 125.0V 121.0V (8). 141.0V 125.0V
3	Input Capacitor	C5 Rated : 82uf 450V	I/P : 531VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 442.0V (2). 438.0V (3). 404.0V
4	Control IC	U1 Rated : 20V (max) 10V (min)	I/P : 531VAC O/P : (1)Full Load Turn on /Off (2)Output Short Change (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25°C	U1 (1). 13.4V (2). 13.4V (3). 13.4V (4). 13.4V (5). 13.5V
5	PFC Power Transistor	Q1 Rated : 1050V 9.0A	I/P : 531VAC I/P : 177VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load contin: PASS (4)Dynamic Load Full/Min Load 90%Duty/1KHz (5)Dynamic Load Full/Min Load 90%Duty/5KHz (6)Dynamic Load Full/Min Load 50%Duty/120Hz (7)0%→400% Load	VIN: 531VAC VDS: (1). 832.0V (2). 820.0V (3). 824.0V (4). 832.0V (5). 836.0V (6). 812.0V (7). 824.0V

Ta : 25°C

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.75KVAC /min I/P-FG : 2.0KVAC /min O/P-FG : 1.5KVAC /min	I/P-O/P: 4.13KVAC /min I/P-FG: 2.40KVAC /min O/P-FG: 1.80KVAC /min Ta : 25°C	I/P-O/P: 2.0mA I/P-FG: 1.9mA O/P-FG: 1.0mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ I/P-FG : 500VDC>100MΩ O/P-FG : 500VDC>100MΩ	I/P-O/P: 500VDC I/P-FG: 500VDC O/P-FG: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9.6GΩ I/P-FG: 18.2GΩ O/P-FG: 21.2GΩ NO DAMAGE
2	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta : 25°C/70%RH	26 mΩ

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONDUCTION	FCC Part 15 Subpart B	I/P : 440VAC/60HZ O/P : FULL LOAD / 30% LOAD Ta : 25°C	PASS Test by certified Lab
2	RADIATION	FCC Part 15 Subpart B	I/P : 480VAC/60HZ O/P : FULL LOAD / 10% LOAD Ta : 25°C	PASS Test by certified Lab
3	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
4	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT : 1KV	I/P : 230VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV;L/N-PE : 4KV	I/P : 230VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	Test by certified Lab & Test Report Prepare. Any contradictions of the test results, please refer to the latest EMC test report.			

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
		MODEL : HVG-240-48 1. ROOM AMBIENT BURN-IN : 3.0hrs IP: 230VAC O/P: 100% LOAD TA= 24.8°C 2. HIGH AMBIENT BURN-IN : 2.0hrs IP: 230VAC O/P: 100% LOAD TA= 59.2°C		

1	TEMPERATURE RISE TEST			<table border="1"> <thead> <tr> <th>CH.</th> <th>Position</th> <th>ROOM AMBIENT Ta= 24.8 ℃</th> <th>HIGH AMBIENT Ta= 59.2 ℃</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>62.7℃</td><td>94.9℃</td></tr> <tr><td>2</td><td>Q1</td><td>63.0℃</td><td>96.3℃</td></tr> <tr><td>3</td><td>Q901</td><td>64.3℃</td><td>98.3℃</td></tr> <tr><td>4</td><td>L2</td><td>61.7℃</td><td>93.6℃</td></tr> <tr><td>5</td><td>C2</td><td>60.2℃</td><td>90.5℃</td></tr> <tr><td>6</td><td>C10</td><td>63.0℃</td><td>95.1℃</td></tr> <tr><td>7</td><td>L1</td><td>66.5℃</td><td>100.0℃</td></tr> <tr><td>8</td><td>ZNR2</td><td>73.2℃</td><td>104.2℃</td></tr> <tr><td>9</td><td>RTH3</td><td>60.5℃</td><td>94.3℃</td></tr> <tr><td>10</td><td>T1</td><td>62.7℃</td><td>98.0℃</td></tr> <tr><td>11</td><td>C46</td><td>62.9℃</td><td>96.7℃</td></tr> <tr><td>12</td><td>C54</td><td>61.1℃</td><td>94.6℃</td></tr> <tr><td>13</td><td>Q102</td><td>59.2℃</td><td>93.5℃</td></tr> <tr><td>14</td><td>C102</td><td>57.8℃</td><td>91.6℃</td></tr> <tr><td>15</td><td>C201</td><td>61.2℃</td><td>94.7℃</td></tr> <tr><td>16</td><td>C200</td><td>59.7℃</td><td>93.4℃</td></tr> <tr><td>17</td><td>U1</td><td>64.1℃</td><td>96.0℃</td></tr> <tr><td>18</td><td>C5</td><td>63.1℃</td><td>96.6℃</td></tr> </tbody> </table>	CH.	Position	ROOM AMBIENT Ta= 24.8 ℃	HIGH AMBIENT Ta= 59.2 ℃	1	BD1	62.7℃	94.9℃	2	Q1	63.0℃	96.3℃	3	Q901	64.3℃	98.3℃	4	L2	61.7℃	93.6℃	5	C2	60.2℃	90.5℃	6	C10	63.0℃	95.1℃	7	L1	66.5℃	100.0℃	8	ZNR2	73.2℃	104.2℃	9	RTH3	60.5℃	94.3℃	10	T1	62.7℃	98.0℃	11	C46	62.9℃	96.7℃	12	C54	61.1℃	94.6℃	13	Q102	59.2℃	93.5℃	14	C102	57.8℃	91.6℃	15	C201	61.2℃	94.7℃	16	C200	59.7℃	93.4℃	17	U1	64.1℃	96.0℃	18	C5	63.1℃	96.6℃
		CH.	Position	ROOM AMBIENT Ta= 24.8 ℃	HIGH AMBIENT Ta= 59.2 ℃																																																																											
		1	BD1	62.7℃	94.9℃																																																																											
		2	Q1	63.0℃	96.3℃																																																																											
		3	Q901	64.3℃	98.3℃																																																																											
		4	L2	61.7℃	93.6℃																																																																											
		5	C2	60.2℃	90.5℃																																																																											
		6	C10	63.0℃	95.1℃																																																																											
		7	L1	66.5℃	100.0℃																																																																											
		8	ZNR2	73.2℃	104.2℃																																																																											
		9	RTH3	60.5℃	94.3℃																																																																											
		10	T1	62.7℃	98.0℃																																																																											
		11	C46	62.9℃	96.7℃																																																																											
		12	C54	61.1℃	94.6℃																																																																											
		13	Q102	59.2℃	93.5℃																																																																											
		14	C102	57.8℃	91.6℃																																																																											
		15	C201	61.2℃	94.7℃																																																																											
		16	C200	59.7℃	93.4℃																																																																											
17	U1	64.1℃	96.0℃																																																																													
18	C5	63.1℃	96.6℃																																																																													
2	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 528VAC / 180VAC O/P : FULL LOAD Ta : -45.0℃	TEST : OK																																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60℃ NO DAMAGE	I/P : 528VAC O/P : FULL LOAD Ta : 60℃ HUMIDITY= 95.0% RH	TEST : OK																																																																												
4	TEMPERATURE COEFFICIENT	±0.03% /℃(0~60℃)	I/P : 347VAC O/P : FULL LOAD	±0.01% /℃(0~60℃)																																																																												
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45℃~ +90℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK																																																																												
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45℃ ~ 65℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 230V Full Load AC ON/OFF to turn on 3sec ; turn off 1sec @ 15cycle Full Load burn in@ 1cycle		TEST : OK																																																																												
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25℃		TEST : OK																																																																												
8	CAPACITOR LIFE CYCLE	HVG-240-48 :SUPPOSE C102 IS THE MOST CRITICAL COMPONENT	(1) I/P : 347VAC O/P : FULL LOAD Tc= 80℃ LIFE TIME (2) I/P : 347VAC O/P : 75% LOAD Tc= 80℃ LIFE TIME (3) I/P : 347VAC O/P : 50% LOAD Tc= 80℃ LIFE TIME	(1). 52071 HRS (2). 58979 HRS (3). 67152 HRS																																																																												
9	MTBF	Conducted by Parts Stress Analysis Prediction 114.5K hrs min. MIL-HDBK-217F (25℃)																																																																														
10	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50℃ Demonstration Mean Time Between Failure : 50,000 hours																																																																														

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT ZENG