



Test Report: ODLC-45-1050

45W Constant Current Mode LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

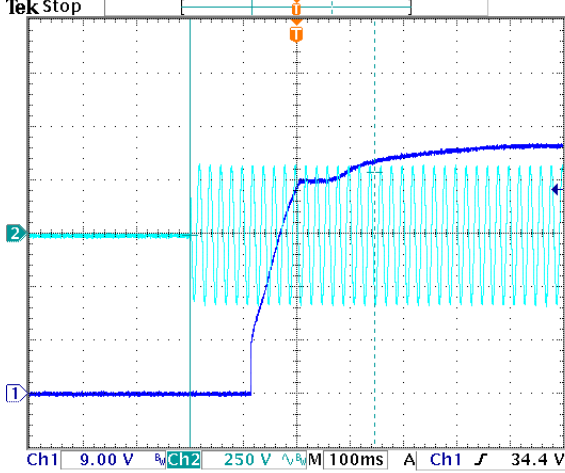
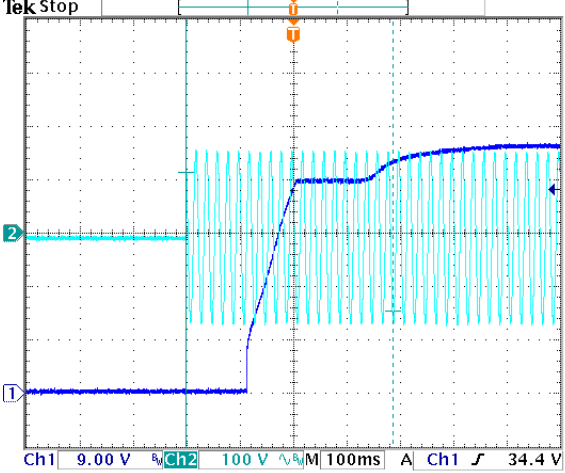
E.M.C. Test

■ RELIABILITY TEST

Environment Test

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

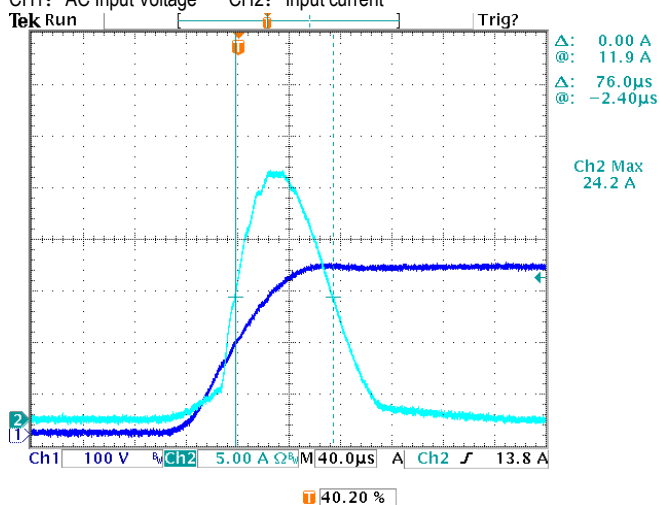
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	26V~43V	I/P: 230VAC O/P: LED MODE Ta: 25°C	10V~43V
2	CURRENT RIPPLE	5% max@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	2.08%
3	CURRENT TOLERANCE	±7%	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	±0.95%
4	OPEN CIRCUIT VOLTAGE (max)	63V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	44.14V
5	OVER/UNDERSHOOT TEST	<±5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<5 %
6	SET UP TIME	500ms/230VAC 1200ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	346ms/230VAC 388ms/115VAC
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage Tek Stop  Δ: 295 V @: -10.0 V Δ: 346ms @: -200ms Ch1 9.00 V Ch2 250 V 100ms A Ch1 34.4 V 50.00 % INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage Tek Stop  Δ: 260 V @: 114 V Δ: 388ms @: -202ms Ch1 9.00 V Ch2 100 V 100ms A Ch1 34.4 V 50.00 %				
7	AUXILIARY DC OUTPUT (A-Type only)	Nominal 12V (deviation 11.4~12.6) @50mA	I/P: 230 VAC O/P: FULL LOAD	11.92 V

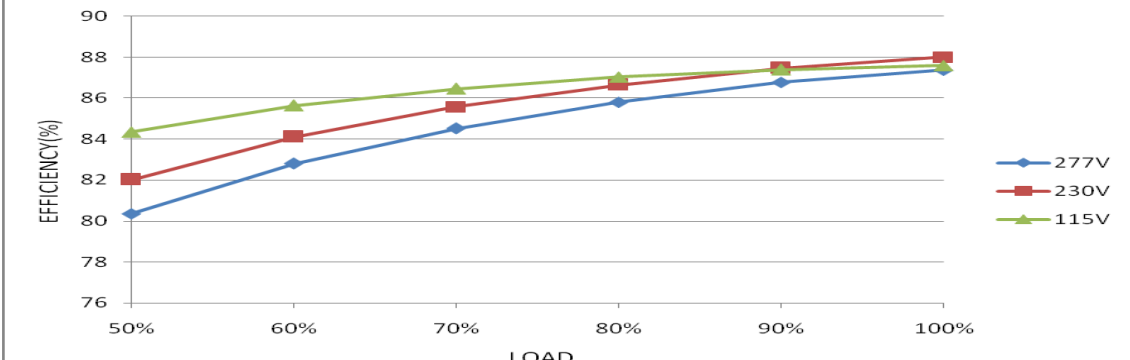
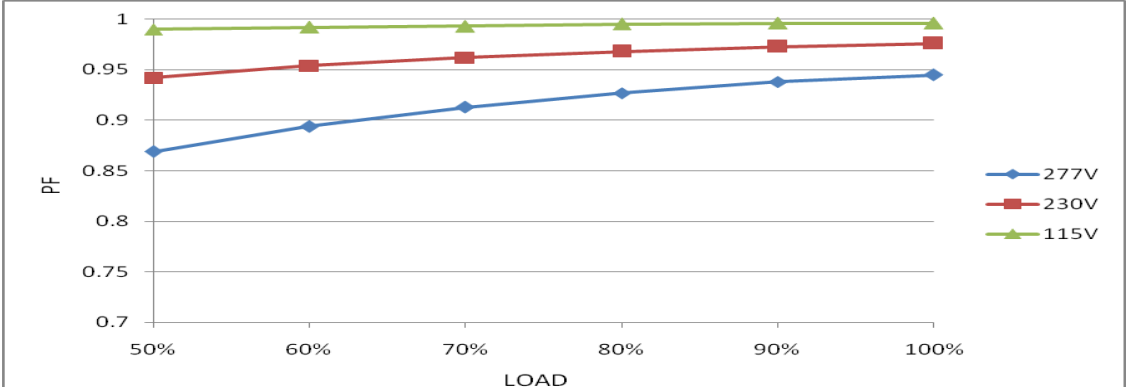
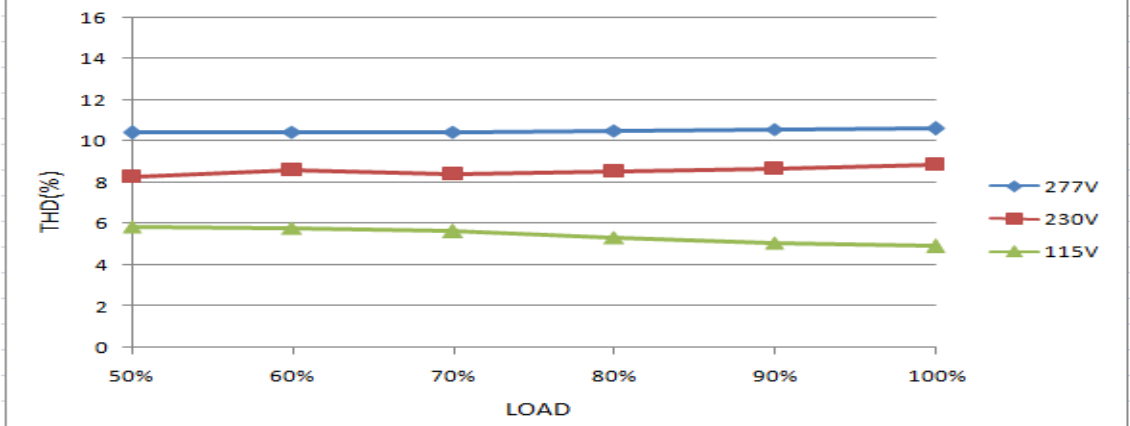
INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~295VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~305V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=305 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~295 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.6A/115VAC 0.4A/230VAC 0.3A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I =0.452A/ 115VAC I =0.229A/ 230VAC I =0.199A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-CASE: 0.0027 mA N-CASE: 0.0027 mA
5	NO LOAD/STANDBY POWER CONSUMPTION	< 0.5W for Blank-Type < 1.2W for A-Type < 0.5W for DA-Type	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.389W for Blank-Type 0.627W for A-Type 0.446W for DA-Type
6	INRUSH CURRENT(Typ)	230V/ 30A Twidth =100 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =24.2A/ 230VAC Twidth =76us

INPUT=230VAC/50HZ @ FULL LOAD

CH1: AC Input Voltage CH2: Input current



7	EFFICIENCY(Typ)	84%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	88.00%																												
EFFICIENCY vs LOAD  <table><caption>Efficiency vs Load Data (Typical)</caption><thead><tr><th>Load (%)</th><th>277V Efficiency (%)</th><th>230V Efficiency (%)</th><th>115V Efficiency (%)</th></tr></thead><tbody><tr><td>50%</td><td>80.5</td><td>82.0</td><td>84.5</td></tr><tr><td>60%</td><td>83.0</td><td>84.0</td><td>85.5</td></tr><tr><td>70%</td><td>84.5</td><td>85.5</td><td>86.5</td></tr><tr><td>80%</td><td>86.0</td><td>87.0</td><td>87.5</td></tr><tr><td>90%</td><td>87.0</td><td>87.5</td><td>88.0</td></tr><tr><td>100%</td><td>87.5</td><td>88.0</td><td>88.0</td></tr></tbody></table>					Load (%)	277V Efficiency (%)	230V Efficiency (%)	115V Efficiency (%)	50%	80.5	82.0	84.5	60%	83.0	84.0	85.5	70%	84.5	85.5	86.5	80%	86.0	87.0	87.5	90%	87.0	87.5	88.0	100%	87.5	88.0	88.0
Load (%)	277V Efficiency (%)	230V Efficiency (%)	115V Efficiency (%)																													
50%	80.5	82.0	84.5																													
60%	83.0	84.0	85.5																													
70%	84.5	85.5	86.5																													
80%	86.0	87.0	87.5																													
90%	87.0	87.5	88.0																													
100%	87.5	88.0	88.0																													
8	POWER FACTOR	0.95/ 115VAC 0.92/ 230VAC 0.90/ 277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.996/ 115VAC PF=0.976/ 230VAC PF=0.945/ 277VAC																												
P.F vs LOAD  <table><caption>P.F vs Load Data (Typical)</caption><thead><tr><th>Load (%)</th><th>277V PF</th><th>230V PF</th><th>115V PF</th></tr></thead><tbody><tr><td>50%</td><td>0.865</td><td>0.945</td><td>0.996</td></tr><tr><td>60%</td><td>0.895</td><td>0.955</td><td>0.996</td></tr><tr><td>70%</td><td>0.915</td><td>0.965</td><td>0.996</td></tr><tr><td>80%</td><td>0.930</td><td>0.970</td><td>0.996</td></tr><tr><td>90%</td><td>0.940</td><td>0.975</td><td>0.996</td></tr><tr><td>100%</td><td>0.945</td><td>0.976</td><td>0.996</td></tr></tbody></table>					Load (%)	277V PF	230V PF	115V PF	50%	0.865	0.945	0.996	60%	0.895	0.955	0.996	70%	0.915	0.965	0.996	80%	0.930	0.970	0.996	90%	0.940	0.975	0.996	100%	0.945	0.976	0.996
Load (%)	277V PF	230V PF	115V PF																													
50%	0.865	0.945	0.996																													
60%	0.895	0.955	0.996																													
70%	0.915	0.965	0.996																													
80%	0.930	0.970	0.996																													
90%	0.940	0.975	0.996																													
100%	0.945	0.976	0.996																													
9	TOTAL HARMONIC DISTORTION	THD<20% (@load≥60%/115VAC, 230VAC; @load≥75%/277VAC)	I/P: 115 VAC/60% LOAD I/P: 230 VAC/60% LOAD I/P: 277 VAC/75% LOAD Ta: 25°C	THD=6.58% @60% load /115VAC THD=8.23% @60% load /230VAC THD=10.45% @75% load /277VAC																												
THD vs LOAD  <table><caption>THD vs Load Data (Typical)</caption><thead><tr><th>Load (%)</th><th>277V THD (%)</th><th>230V THD (%)</th><th>115V THD (%)</th></tr></thead><tbody><tr><td>50%</td><td>10.45</td><td>8.23</td><td>5.8</td></tr><tr><td>60%</td><td>10.45</td><td>8.23</td><td>5.5</td></tr><tr><td>70%</td><td>10.45</td><td>8.23</td><td>5.2</td></tr><tr><td>80%</td><td>10.45</td><td>8.23</td><td>5.0</td></tr><tr><td>90%</td><td>10.45</td><td>8.23</td><td>4.8</td></tr><tr><td>100%</td><td>10.45</td><td>8.23</td><td>4.8</td></tr></tbody></table>					Load (%)	277V THD (%)	230V THD (%)	115V THD (%)	50%	10.45	8.23	5.8	60%	10.45	8.23	5.5	70%	10.45	8.23	5.2	80%	10.45	8.23	5.0	90%	10.45	8.23	4.8	100%	10.45	8.23	4.8
Load (%)	277V THD (%)	230V THD (%)	115V THD (%)																													
50%	10.45	8.23	5.8																													
60%	10.45	8.23	5.5																													
70%	10.45	8.23	5.2																													
80%	10.45	8.23	5.0																													
90%	10.45	8.23	4.8																													
100%	10.45	8.23	4.8																													

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	SHORT CIRCUIT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 90VAC I/P: 295VAC O/P: FULL LOAD Ta: 25℃	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q 1 Rated 800V/6A	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25℃	(1) 580V (2) 522V (3) 576V
2	O/P Diode (MOSFET)	D100 Rated 400V/16A	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25℃	(1) 316V (2) 343V (3) 312V
3	Control IC	U1 Rated 35V (MAX)	I/P: High-Line +3V =298V O/P: (1) FULL LOAD (2) Output Short (3) Low Line No Load Ta: 25℃	(1) 17.7V (2) 17.7V (3) 17.6V
4	Clamp Diode	D 1 Rated 1000V/1A	I/P: High-Line +3V = 298V O/P: (1) Full Load input on/off (2) Output Short Ta: 25℃	(1) 498V (2) 478V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2 KVAC/min Ta: 25°C	I/P-O/P: 2.578mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500 VDC Ta: 25°C/70% RH	I/P-O/P: >9999MΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230 VAC/50HZ O/P: FULL/60% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL: ODL-45-1050 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 32.5℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 53.7℃ <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 32.5 ℃</th><th>HIGH AMBIENT Ta=53.7 ℃</th></tr><tr><td>1</td><td>L1</td><td>75.2℃</td><td>96.7℃</td></tr><tr><td>2</td><td>BD1</td><td>71.5℃</td><td>92.6℃</td></tr><tr><td>3</td><td>D1</td><td>73.5℃</td><td>95.3℃</td></tr><tr><td>4</td><td>Q1</td><td>77.6℃</td><td>99.7℃</td></tr><tr><td>5</td><td>U1</td><td>71.7℃</td><td>92.0℃</td></tr><tr><td>6</td><td>T1</td><td>76.8℃</td><td>98.2℃</td></tr><tr><td>7</td><td>C16</td><td>71.3℃</td><td>92.6℃</td></tr><tr><td>8</td><td>RG1</td><td>79.5℃</td><td>100.6℃</td></tr><tr><td>9</td><td>D100</td><td>75.2℃</td><td>96.2℃</td></tr><tr><td>10</td><td>C201</td><td>69.3℃</td><td>90.2℃</td></tr><tr><td>11</td><td>Q100</td><td>72.4℃</td><td>93.8℃</td></tr><tr><td>12</td><td>L100</td><td>70.1℃</td><td>91.7℃</td></tr><tr><td>13</td><td>C106</td><td>69.3℃</td><td>90.4℃</td></tr><tr><td>14</td><td>C110</td><td>67.8℃</td><td>89.1℃</td></tr><tr><td>15</td><td>TC</td><td>63.7℃</td><td>83.3℃</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 32.5 ℃	HIGH AMBIENT Ta=53.7 ℃	1	L1	75.2℃	96.7℃	2	BD1	71.5℃	92.6℃	3	D1	73.5℃	95.3℃	4	Q1	77.6℃	99.7℃	5	U1	71.7℃	92.0℃	6	T1	76.8℃	98.2℃	7	C16	71.3℃	92.6℃	8	RG1	79.5℃	100.6℃	9	D100	75.2℃	96.2℃	10	C201	69.3℃	90.2℃	11	Q100	72.4℃	93.8℃	12	L100	70.1℃	91.7℃	13	C106	69.3℃	90.4℃	14	C110	67.8℃	89.1℃	15	TC	63.7℃	83.3℃
NO	Position	ROOM AMBIENT Ta= 32.5 ℃	HIGH AMBIENT Ta=53.7 ℃																																																																	
1	L1	75.2℃	96.7℃																																																																	
2	BD1	71.5℃	92.6℃																																																																	
3	D1	73.5℃	95.3℃																																																																	
4	Q1	77.6℃	99.7℃																																																																	
5	U1	71.7℃	92.0℃																																																																	
6	T1	76.8℃	98.2℃																																																																	
7	C16	71.3℃	92.6℃																																																																	
8	RG1	79.5℃	100.6℃																																																																	
9	D100	75.2℃	96.2℃																																																																	
10	C201	69.3℃	90.2℃																																																																	
11	Q100	72.4℃	93.8℃																																																																	
12	L100	70.1℃	91.7℃																																																																	
13	C106	69.3℃	90.4℃																																																																	
14	C110	67.8℃	89.1℃																																																																	
15	TC	63.7℃	83.3℃																																																																	
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 295VAC/90VAC O/P: FULL/80% LOAD Ta= -25℃	TEST: OK																																																																
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=50 ℃ HUMIDITY= 95 %R.H	TEST: OK																																																																
4	TEMPERATURE COEFFICIENT	±0.03 %/℃ (0~40℃)	I/P: 230 VAC O/P: FULL LOAD	±0.001%/℃																																																																
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: AC OFF STATIC		TEST: OK																																																																

6	THERMAL SHOCK TEST	1. Thermal shock Temperature: Tcase=-25℃~ +45℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST	TEST: OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25℃	TEST: OK
8	CAPACITOR LIFE CYCLE	ODLC-45-1050: SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 50 ℃ LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 ℃ LIFE TIME (4) I/P: 230VAC O/P: MIN LOAD Ta= 50 ℃ LIFE TIME	(1) 280778 HRS (2) 50053 HRS (3) 55816 HRS (4) 65277 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 3513.4K hrs min. Telcordia SR-332 (Bellcore) ; 340.8K hrs min. MIL-HDBK-217F (25℃)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 30,000 hours @ Tcase 85℃ ; 50,000 hours @ Tcase 75℃	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Carychen/ZHUOKB	SKY	LIUWY