



Test Report: NPF-120D-42

120W Single Output LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test


DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	25.2-42V	I/P: 230VAC O/P: LED MODE Ta: 25°C	18 V~41 V
2	CURRENT RIPPLE	5% max@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	1.12 %
3	CURRENT TOLERANCE	±5%	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	0.86 %
4	OVER/UNDERSHOOT TEST	< ± 5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	< 5 %
5	AUXILIARY DC OUTPUT (For BE-Type only)	Nominal 12V (deviation 11.4-12.6) @0.2A for BE-Type only	I/P: 230 VAC O/P: FULL LOAD	11.88V
6	SET UP TIME(Max)	230VAC/ 500ms 115VAC/ 500ms	I/P: 230 VAC I/P: 115 VAC O/P: 95% LOAD Ta: 25°C	230VAC/ 304 ms 115VAC/ 316 ms


INPUT=230VAC/50HZ @ 95% LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

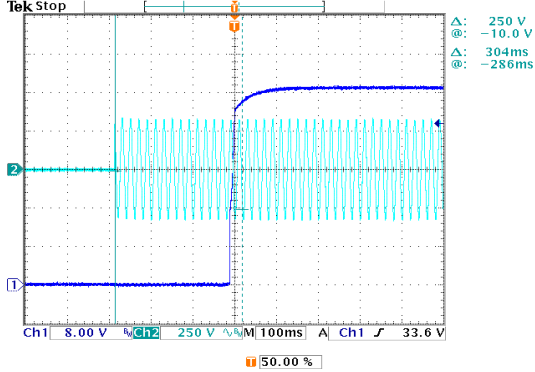


INPUT=115VAC/50HZ @ 95% LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

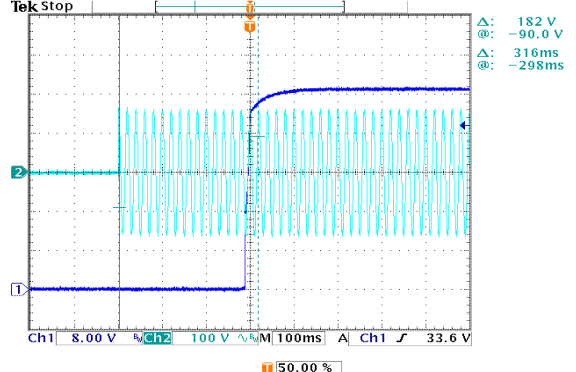


7 DIMMING TEST





- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10Vdc, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100uA (typ.)
- © Applying additive 0 ~ 10VDC

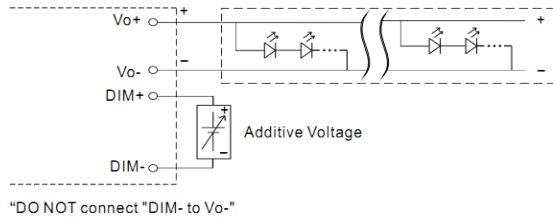

© Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

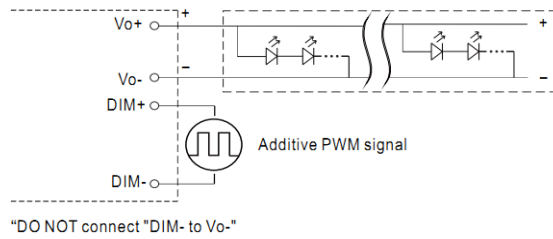

© Applying additive resistance:

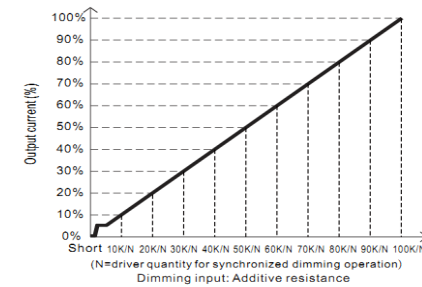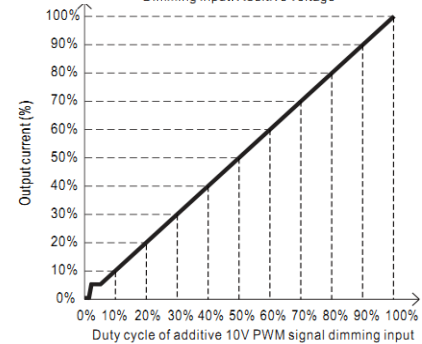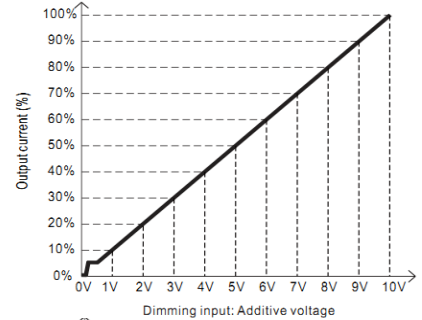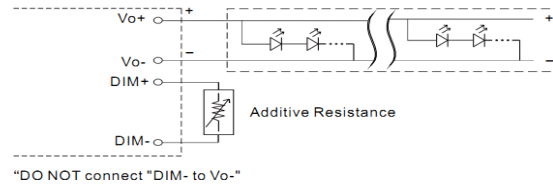

Note : 1. Min. dimming level is about 6% and the output current is not defined when 0% < I_{out} < 6%.
 2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.

※ Auxiliary DC operation (for BE-type)
 • AUX+, with mark ***, is added for BE-Type, used as the Auxiliary DC output with respect to DIM-.

I/P: 230 VAC
 O/P: DIMMING TEST
 Ta: 25°C

	V	Short	Dimming Input										OPEN
			1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	
1	Output Current	0	0.232	0.51	0.79	1.069	1.348	1.628	1.906	2.186	2.633	2.829	2.900
	%	0%	8.00%	17.59%	27.24%	36.86%	46.48%	56.14%	65.72%	75.38%	90.79%	97.55%	100.0%
	PWM(100Hz)	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
2	Output Current	0	0.208	0.487	0.767	1.047	1.326	1.607	1.886	2.311	2.608	2.804	2.900
	%	0%	7.17%	16.79%	26.45%	36.10%	45.72%	55.41%	65.03%	79.69%	89.93%	96.69%	100.00%
	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
3	Output Current	0	0.208	0.487	0.767	1.047	1.326	1.607	1.886	2.311	2.608	2.804	2.900
	%	0%	7.17%	16.79%	26.45%	36.10%	45.72%	55.41%	65.03%	79.69%	89.93%	96.69%	100.0%

TEST RESULT: OK



INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~305V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230VAC ON: 3Sec OFF: 3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~305 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	1.3A/115VAC 0.65A/230VAC 0.55A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I=1.113A/ 115VAC I=0.569A/ 230VAC I=0.482A/ 277VAC
4	LEAKAGE CURRENT	< 0.25mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.003 mA N-FG: 0.003 mA
5	STANDBY POWER CONSUMPTION	< 0.5W	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.418 W
6	INRUSH CURRENT(Typ)	60A/230VAC Twidth =520 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I= 51.6 A/ 230VAC Twidth = 448 us
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH2: Input current CH1: AC Input Voltage</p> <p>Ch2 Max 51.6 A</p> <p>89.80%</p>				
7	EFFICIENCY(Typ)	89.5% (BLANK-TYPE) 89.0% (BE-TYPE)	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	90.06% (BLANK-TYPE) 89.42% (BE-TYPE)



120W Single Output LED Driver


NPF-120D series

EFFICIENCY vs LOAD

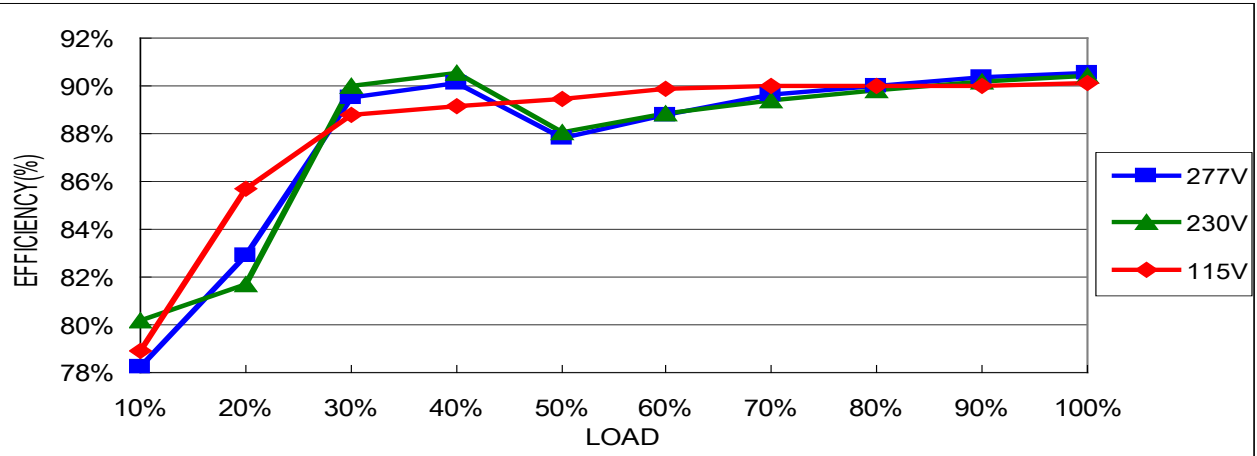


8	POWER FACTOR	0.97/ 115VAC	I/P: 115 VAC	PF=0.994/ 115VAC
		0.96/ 230VAC	I/P: 230 VAC	PF=0.975/ 230VAC
		0.94/ 277VAC	I/P: 277 VAC	PF=0.956/ 277VAC
			O/P: FULL LOAD	
			Ta: 25°C	

P.F vs LOAD

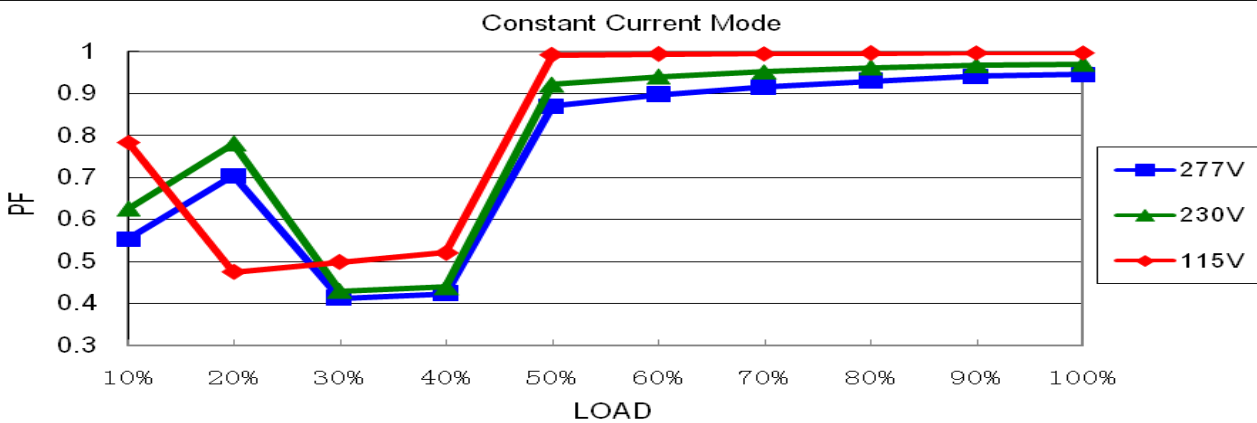

9	TOTAL HARMONIC DISTORTION	THD < 20%	I/P: 115 VAC/60% LOAD	THD=5.83% @60% load /115VAC
		(@load ≥ 60%/115VAC, 230VAC; @load ≥ 75%/277VAC)	I/P: 230 VAC/60% LOAD	THD=13.62 % @60% load /230VAC
			I/P: 277 VAC/75% LOAD	THD=14.59% @75% load /277VAC
			Ta: 25°C	

THD vs LOAD

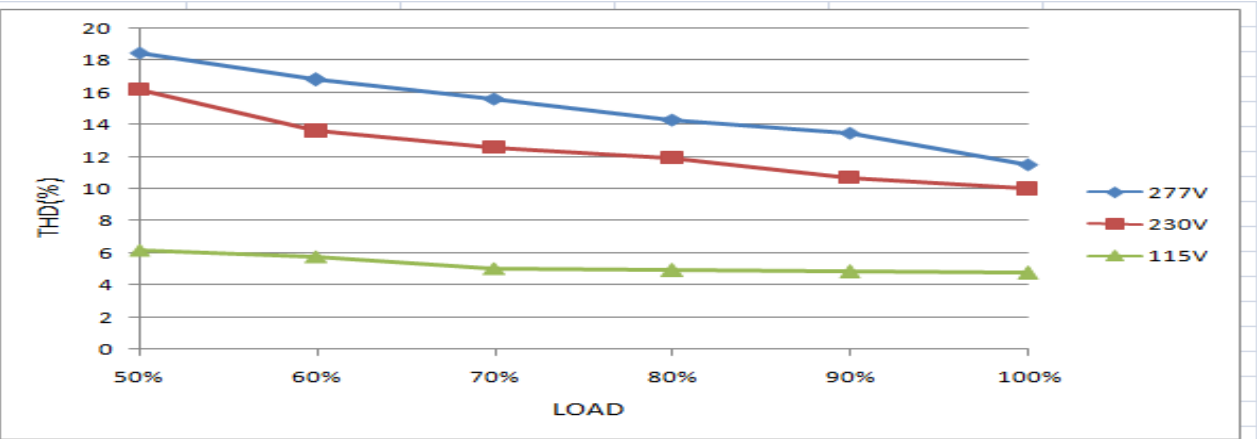



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	95 %~ 108 %	I/P: 230VAC O/P: TESTING Ta: 25°C	101.28%/ 230VAC Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	46V~54V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	50.4V/ 230VAC Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage, re-power on to recover
4	SHORT CIRCUIT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 2 Rated 730V/10A	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 660V (2) 500V (3) 630V
2	Diode Peak Voltage	Q101 Rated 200V/20A	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 179V (2) 119V (3) 169V
3	Input Capacitor Voltage	C5 Rated 100u/ 450V	I/P: High-Line +3V =308 V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change Ta: 25°C	(1) 448V (2) 444V (3) 447V
4	Control IC Voltage Test	U1 Rated 28V	I/P: High-Line +3V =308 V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change Ta: 25°C	(1) 17.7V (2) 17.4V (3) 17.4V
5	PFC Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated 600V/11A	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 475V (2) 458V (3) 466V



SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2KVAC/min Ta: 25°C	I/P-O/P: 1.992 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500VDC Ta: 25°C	I/P-O/P: > 9999MΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 115VAC/230VAC/50HZ O/P: 60%/FULL LOAD I/P: 277VAC/50HZ O/P: 75%/FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	EN61000-4-5 INDUSTRY L-N: 2KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST


ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL: NPF-120D-48 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 29.2°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 51.1°C																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 29.2 °C</th> <th>HIGH AMBIENT Ta=51.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>C5</td><td>71.6°C</td><td>90.1°C</td></tr> <tr><td>2</td><td>C105</td><td>65.6°C</td><td>84.5°C</td></tr> <tr><td>3</td><td>T1</td><td>73.3°C</td><td>92.4°C</td></tr> <tr><td>4</td><td>Q1</td><td>76.3°C</td><td>95.8°C</td></tr> <tr><td>5</td><td>Q2</td><td>82.6°C</td><td>102.8°C</td></tr> <tr><td>6</td><td>Q101</td><td>68.4°C</td><td>86.7°C</td></tr> <tr><td>7</td><td>L3</td><td>77.4°C</td><td>96.9°C</td></tr> <tr><td>8</td><td>D6</td><td>86.1°C</td><td>106.7°C</td></tr> <tr><td>9</td><td>C45</td><td>67.3°C</td><td>85.9°C</td></tr> <tr><td>10</td><td>R7</td><td>84.3°C</td><td>104.1°C</td></tr> <tr><td>11</td><td>U1</td><td>66.7°C</td><td>85.4°C</td></tr> <tr><td>12</td><td>C106</td><td>61.9°C</td><td>80.6°C</td></tr> <tr><td>13</td><td>RTH3</td><td>64.9°C</td><td>83.4°C</td></tr> <tr><td>15</td><td>TC</td><td>68.4°C</td><td>87.3°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 29.2 °C	HIGH AMBIENT Ta=51.1 °C	1	C5	71.6°C	90.1°C	2	C105	65.6°C	84.5°C	3	T1	73.3°C	92.4°C	4	Q1	76.3°C	95.8°C	5	Q2	82.6°C	102.8°C	6	Q101	68.4°C	86.7°C	7	L3	77.4°C	96.9°C	8	D6	86.1°C	106.7°C	9	C45	67.3°C	85.9°C	10	R7	84.3°C	104.1°C	11	U1	66.7°C	85.4°C	12	C106	61.9°C	80.6°C	13	RTH3	64.9°C	83.4°C	15	TC	68.4°C	87.3°C
NO	Position	ROOM AMBIENT Ta= 29.2 °C	HIGH AMBIENT Ta=51.1 °C																																																													
1	C5	71.6°C	90.1°C																																																													
2	C105	65.6°C	84.5°C																																																													
3	T1	73.3°C	92.4°C																																																													
4	Q1	76.3°C	95.8°C																																																													
5	Q2	82.6°C	102.8°C																																																													
6	Q101	68.4°C	86.7°C																																																													
7	L3	77.4°C	96.9°C																																																													
8	D6	86.1°C	106.7°C																																																													
9	C45	67.3°C	85.9°C																																																													
10	R7	84.3°C	104.1°C																																																													
11	U1	66.7°C	85.4°C																																																													
12	C106	61.9°C	80.6°C																																																													
13	RTH3	64.9°C	83.4°C																																																													
15	TC	68.4°C	87.3°C																																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/100VAC O/P: FULL LOAD Ta= -45°C / -30°C	TEST: OK																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45 °C NO DAMAGE	I/P: 315VAC O/P: FULL LOAD Ta=45 °C HUMIDITY= 95% R.H	TEST: OK																																																												
4	TEMPERATURE COEFFICIENT	±0.03%/°C (0~50°C)	I/P: 230 VAC O/P: FULL LOAD	±0.002%/°C (0~50°C)																																																												
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																												



120W Single Output LED Driver

NPF-120D series

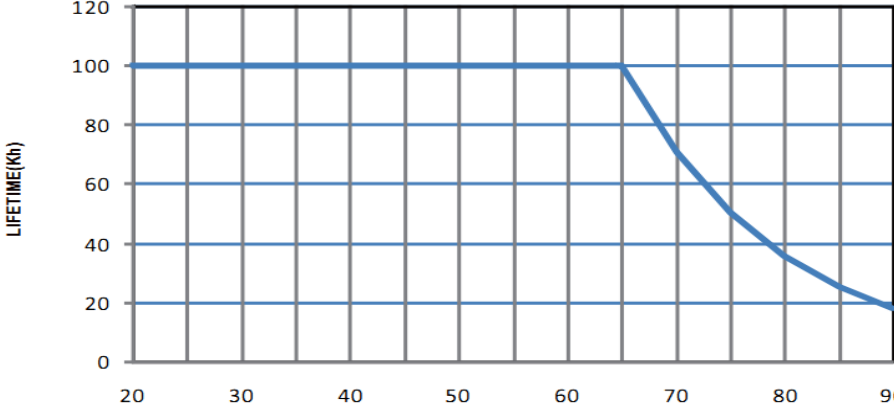6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -45°C~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST turn on 58 sec, turn off 2 sec;	TEST: OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 12min/sweep cycle (4) Acceleration: 5G (5) Test Time: 72min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	NPF-120D-48: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 45 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 45 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 45 °C LIFE TIME	(1) 174464 HRS (2) 53707 HRS (3) 99512 HRS (4) 103761 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 2632.6K hrs min. Telcordia SR-332 (Bellcore) ; 233.9K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50000 hours @ TC 75°C 	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	ZHUOKB/CHENZH	SKY	LIUWY